

Halbert[®]
Pool & Spa




JAPANESE TECHNOLOGY

DS WATER TECHNOLOGY

A Water Management Company

PRODUCT CATALOGUE

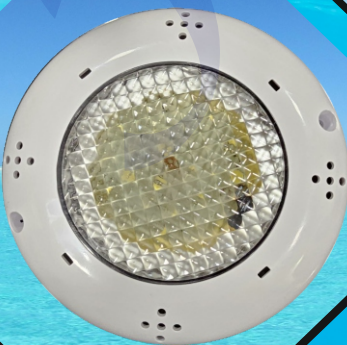

Halbent

INDEX

Sr. No.	Product Name	Page No
1.	Introduction	1
2.	Filtration Equipment	2, 3, 4, 5
3.	Filter Media	6
4.	Swimming Pool Pumps	7, 8, 9, 10, 11
5.	Pool Fittings	12, 13
6.	Pool Cleaning Equipment	14, 15, 16, 17, 18
7.	Under Water Lights/ Lighting	19, 20, 21, 22, 23
8.	Counter Current System	24
9.	Swimming Pool Grating	25
10.	Swimming Pool Ladders	26, 27
11.	Pool Cover	28
12.	Spa & Bath Fittings	29, 30
13.	Sauna & Steam	31
14.	Pool Heating System	32, 33, 34
15.	Water Treatments/ Ozone Generators	35, 36, 37
16.	Competition Equipment	38
17.	Life Saving & Inflatable Equipments	39, 40
18.	Valves & Fittings	40
19.	Fountain Nozzles	41, 42
20.	Water Features	43, 44
21.	Swimming Pool Tiles	45, 46, 47
22.	Pool & Garden Furniture	48, 49
23.	Photo Gallery	50, 51



INTRODUCTION

DS Water Technology is an International Standard Indian Company which is leading , Supplier, Manufacturer, Importer of an exclusive range of Swimming pool equipments, Accessories, Pool furniture , Fountain accessories, Spa equipment & Swimming Pool Chemicals, We are also developing products according to Indian Customer's requirements.

Our products are manufactured from the best quality raw material and are quality tested before dispatch. The products are manufactured with the product appropriate technology incorporating all the necessary protection features. The products are available with various options of sizes and colors (in some cases) to suit your needs.

The Company is committed to deliver high quality products, improved technology backed with dedicated services and above all our competitiveness ensures complete customer satisfaction.



Diversity

Diversity is at the heart of our business. We are highly encouraged that our workforce will become more representative at all levels of the company.



Respect

It's our privilege to have customers who use our products. Each and every customer deserves to be treated with respect.



Transparency

Transparency is our key to success and creating trust with our clients because it helps us to improve our services about the value of what we're offering.



Integrity

DS Water Technology success is built on a foundation of their experience and professional integrity and commitment to excellence.



DHARMENDRA SINGH

MANAGING DIRECTOR

Mr. DHARMENDRA SINGH has over 15 years of top experience in swimming pool industries, and is known as the leader of swimming pool equipment suppliers in all over India. As a Managing Director of the DS Water Technology, His experience and professionalism is the strength of the company, His aim is to work hard and to move the company towards the sky.

FILTRATION EQUIPMENT



FILTRATION EQUIPMENT


Top Mount Fiber Glass Bobbin Wound Sand Filter



FEATURES:-

The fiberglass winding design enables the filter to be durable, deforming-proof and corrosion resistant.

- A unique and advanced design ensures fast draining and stabilizes water flow.
- The 6-position multi-port valve with a user friendly handle easily provides you a maximum flow at low pressure drop.
- The Sand filter comes with a precise pressure gauge.
- It is easy to install and to maintain.
- The Outlet turbidity is less than 2FTU.
- Working pressure is 2.5 Kg cm²/36 psi.
- UV resistance surface allows the filter to work under direct sunlight.
- Maximum operating temperature is 43°C.
- Shell thickness over 6mm.
- Integral side glass for watching backwash cycle.



TECHNICAL INFORMATION

Code	Model	Design Flow m ³ /h	Filtration Area m ²	Pipe Size (Inch)	Sand Req. Kg
HT-16	HT400-16"	6.5	0.13	1.5	45
HT-18	HT450-18"	8.2	0.17	1.5	75
HT-22	HT550-22"	12.5	0.25	1.5	110
HT-25	HT650-25"	16.4	0.36	1.5	170
HT-28	HT700-28"	21.3	0.41	1.5	190
HT-30	HT750-30"	24.2	0.45	2.0	250
Ht-33	HT800-33"	26.8	0.51	2.0	350
HT-36	HT900-36"	32.6	0.65	2.0	470
HT-40	HT1000-40"	39.0	0.78	2.0	620
HT-48	HT1200-48"	49.0	1.14	2.0	900

PRODUCT DIMENSION

Code	HT-16	HT-18	HT-22	HT-25	HT-28	HT-30	HT-33	HT-36	HT-40	HT-48
A	400	450	550	650	700	750	800	900	1000	1200
B	536	580	610	710	740	730	870	970	1160	1164
C	730	840	870	970	1000	1020	1160	1260	1380	1450

FILTRATION EQUIPMENT


Side Mount Fiber Glass Bobbin Wound Sand Filter



FEATURES:-

The fiberglass winding design enables the filter to be durable, deforming-proof and corrosion resistant.

- A unique and advanced design ensures fast draining and stabilizes water flow.
- The 6-position multi-port valve with a user friendly handle easily provides you a maximum flow at low pressure drop.
- The Sand filter comes with a precise pressure gauge.
- It is easy to install and to maintain.
- The Outlet turbidity is less than 2FTU.
- Working pressure is 2.5 Kg cm²/36 psi.
- UV resistance surface allows the filter to work under direct sunlight.
- Maximum operating temperature is 43°C.
- Shell thickness over 6mm.
- Integral side glass for watching backwash cycle.

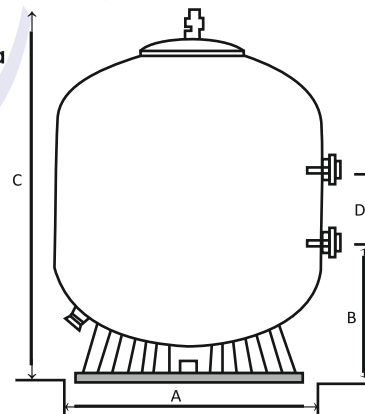

TECHNICAL INFORMATION:-

Code	Model	Design Flow m ³ /h	Filtration Area m ²	Pipe Size (Inch)	Sand Required Kg
HS-36	HS900-36"	31.68	0.64	2.0	400
HS-40	HS1000-40"	39.10	0.79	2.0	500
HS-44	HS1100-44"	47.03	0.95	2.0	600
HS-48	HS1200-48"	55.94	1.13	2.0	950
HS-56	HS1400-56"	76.23	1.54	2.0	1350
HS-64	HS1600-64"	100	2.06	4.0	2300
HS-72	HS1800-72"	120	2.52	6.0	2900
HS-80	HS2000-80"	145	2.97	6.0	4000

PRODUCT DIMENSION

Code	HS-36	HS-40	HS-44	HS-48	HS-56	HS-64	HS-72	HS-80
A	900	1000	1100	1200	1400	1600	1800	2000
B	530	540	540	660	770	1450	1610	1800
C	1020	1020	1200	1210	1350	810	850	900
D	142	142	142	142	142	1740	2040	2210

Filtration Equipment

Halbert Wall-Mounted : Integrative Pool Filter


FEATURES:-

Halbert brings the world's most advanced swimming pool filtration system - Halbert Integrative Pipe Less Filter. The Filter integrates the multiple functions of filtration, disinfection Vacuum cleaning, illumination and Whirlpool Massage. The filter eliminates the requirement of balancing tank, buried pipes, plumbing and pump room. The Halbert Pipe less Filter can fit any existing water body, swimming pool or pond easily. The enclosure is made of high quality Fiber Glass which is known for its properties of acid and ageing resistance.

The filter body is tough and strong. The filter is easy to clean and install. Inlet & Outlet point massage Jet Nozzle Led Light, Stainless steel Handrail.



TECHNICAL CHARACTERISTICS		EQUIPMENT	
Dimensions	1110x670x780mm	Filtration Pump	1x1HP, 1x1.5HP
Flow Rate	10m ³ /h, 15m ³ /h, 25m ³ /h	Filtration Basket with Bag	1pc
Voltage	220V / 50Hz or 60Hz	Chlorine Feeder	1pc
Precision of Filtration Bag	≤ 5u	Light (warm white)	1x LED 12W/ 12V
Operating Noise	≤ 50Db	Time Controller	1pc
Material	Acrylic	Swim Jet	2pcs
Installation	Wall Mounting	Handrail (S.S.)	2pcs
Available	HPF-10 -10m ³ /h, HPF-15 -15m ³ /h HPF-25 -25m ³ /h, HPF-35 -35m ³ /h	Ozone(optional)	1pc
		Lighting System	1pc

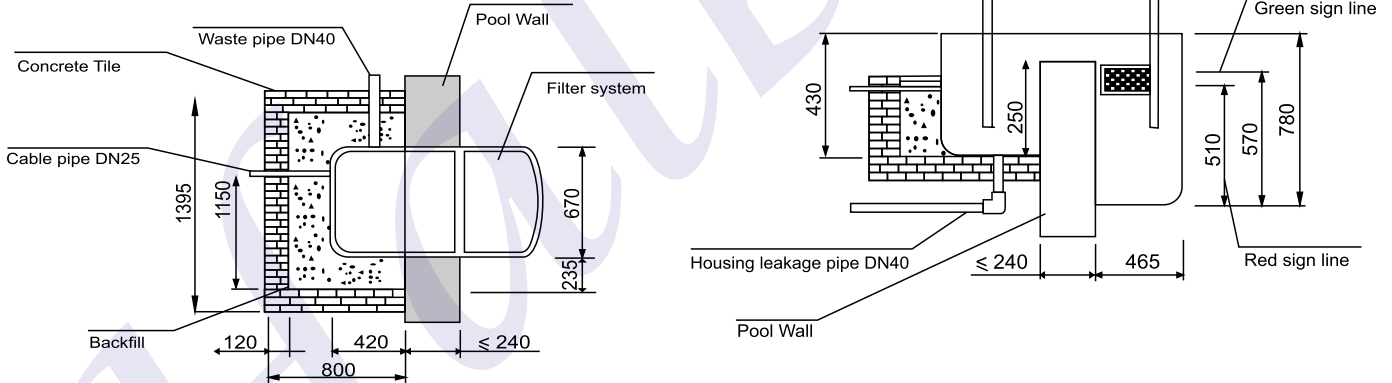

Cartridge Filters

FEATURES:-

- ☞ Cartridge Filtration is an effective trouble free proven method of filtration.
- ☞ Single locking knob securely fastens head to filter tank.
- ☞ Attractive, durable filter head can be rotated to conveniently position pressure gauge and manual air relief.
- ☞ Injection-moulded filter tank for dependable, corrosion-free performance.
- ☞ Elevated, filtered water collector & debris sump prevents accidental by-pass of heavy debris to pool or spa when cartridge is removed for cleaning, Working pressure 2.5 kg/cm square/36 psi.
- ☞ Cartridge element can be reused after cleaning.
- ☞ Outer cover is made of reinforced plastic & cartridge element is made up of working polyester material



Model	AF 25	AF 50	AF 75	AF 100	AF 150
Design Flow (M ³ /h)	5.5	11.4	17.0	22.9	33.4
Height	387mm	567mm	747mm	927mm	1107mm

Filter Media

Glass Media

		
Grade-1	Grade-2	Grade-3
Size:4/8, Packaging: 25kg Bag	Size:8/16 Packaging: 25kg Bag	Size:16/32 Packaging: 25kg Bag

Halbert Pool Glass Filter Media is the environmentally friendly filter media and a viable alternative to sand made from glass recycled in the Japan, it doesn't involve intrusive mining and the use of scarce resources.

This media is more efficient. It can remove up to 30% more material and pollutants than, so saving on backwash and the resultant water, energy and chemical treatment costs.

This media is suitable for both commercial and residential filters with laterals or nozzle plates.

Silica Sand



The single media filtration by use of filter sand is widely spread as a general filtering method. However these days the treated water quality standards are tightened in addition to the deterioration problem of raw water quality arisen from the growth of algae and cryptosporidium, the part of filtration, which is a key point of water purification became more important and performance is required.

Pre-filtration to protect membrane process from fouling.

Filtration of cool water to prevent heat exchanger fouling.

Pressure filters use granular media to remove contaminants from water.



SWIMMING POOL PUMP

Swimming Pool Pumps

Swimming Pool Pumps



APPLICATIONS:

Jet pumps for Bath Tubs, Spa, Swimming Pools, Massage Stations and Cleaning Systems.

FEATURES:

Wet ends made up of high reinforced engineering thermal plastic with compact structure and corrosion-resistance.

- 1.5 inch Inlet and outlet.
- Highly efficient structure design for diffusor and impeller to get higher performance.
- No contact between motor shaft and liquid.
- Motor / Pump shaft has no contact with the water.
- Continuous Operations
- Mechanical Seal in SIC.

MOTOR:


2-pole induction motor Single-phase : 220-240/50Hz Single-phase with thermal protector

- a. Capacitor inset
- b. Insulation class F
- c. Protection IPX5
- d. Continuous duty


H-PC SERIES

Model	Power (P1)		Qmax (l/min)	Hmax (m)	V/Hz	(Amps)	Fitting Size (mm)	(Kg)
	KW	HP						
HPC-050	0.37	0.50	195	7	220-240/50	1.9	48.5 or 50	9.3
HPC-075	0.55	0.75	255	10	220-240/50	2.7	48.5 or 50	9.5
HPC-100	0.75	1.0	340	12.5	220-240/50	3.8	48.5 or 50	9.7
HPC-150	1.1	1.5	390	17.5	220-240/50	5.8	48.5 or 50	10.9
HPC-200	1.5	2.0	470	18.5	220-240/50	7.0	48.5 or 50	11.5

HQ SERIES

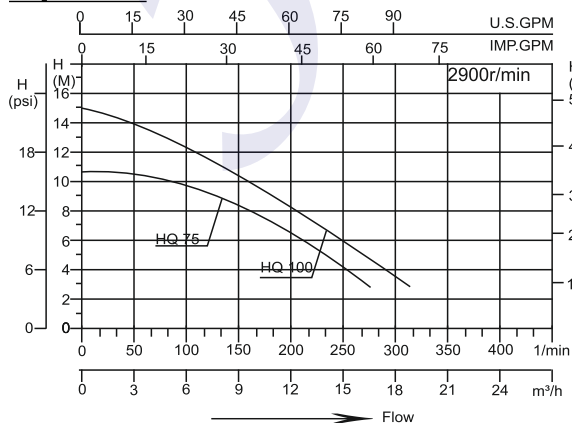

Model	Qmax (L/min)	Hmax (m)	V/Hz	Power(P1)		Fitting Size (mm)	Filter basket Volume (L)	Weight (Kg)
				KW	HP			
HQ 075	280	11	220-240/50	0.55	0.75	48.5 or 50	1	10.8
HQ 100	310	14.5		0.75	1.0			11.6

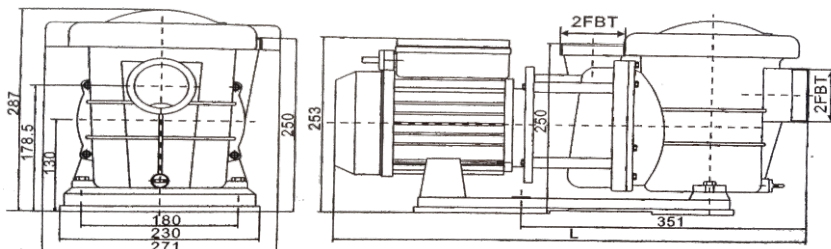

Swimming Pool Pumps

Swimming Pool Pumps



Applications:

Jet pumps for Bath Tubs, Spa, Swimming Pools, Massage Stations and Cleaning Systems.

Features:

- Motor/Pump shaft has no contact with the water.
- Total electrical separation.
- 2.2L pre filter.
- 2" inlet & outlet.

Operative Conditions:

- Liquid temperature from +5°C ~ +60°C.
- Ambient temperature up to 50°C.
- Max working pressure : 3 bar

Motor:

- L2-pole induction motor Single-Phase: 220-240V/50Hz
- Single-phase with thermal protector T.T.
- Capacitor inset.
- Insulation class F.
- Protection IPX5
- Continuous duty





HQ SERIES

Model	Qmax (l/min)	Hmax (m)	Power (P1)		L	(Kg)
			KW	HP		
HQ 150	430	16.5	1.1	1.5	573	13.5
HQ 200	520	18.0	1.5	2.0	573	14
HQ 300	635	19.5	2.2	3.0	598	17


H-PB SERIES

Model	Power (P1)		Qmax (l/min)	Hmax (m)	V	Packing Size (mm)
	KW	HP				
HPB-100	0.9	1.0	350	12.5	220	675x315x420
HPB-150	1.1	1.5	380	16.5	220	675x315x420
HPB-200	1.5	2.0	500	20	220	675x315x420
HPB-300	2.2	3.0	600	22	220	675x315x420

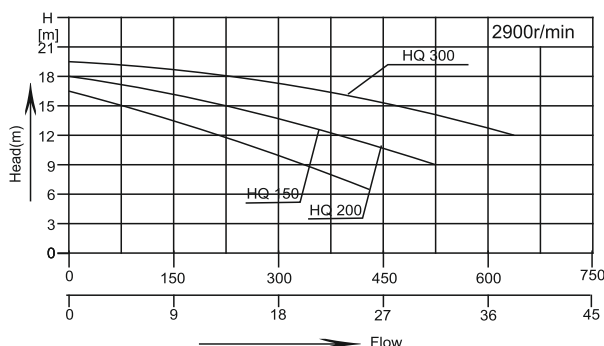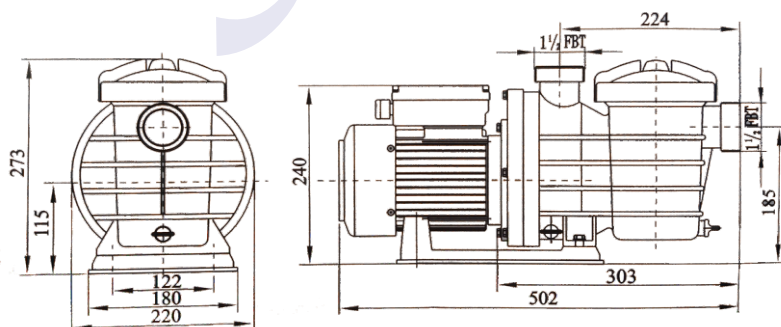

Swimming Pool Pumps

Swimming Pool Pumps



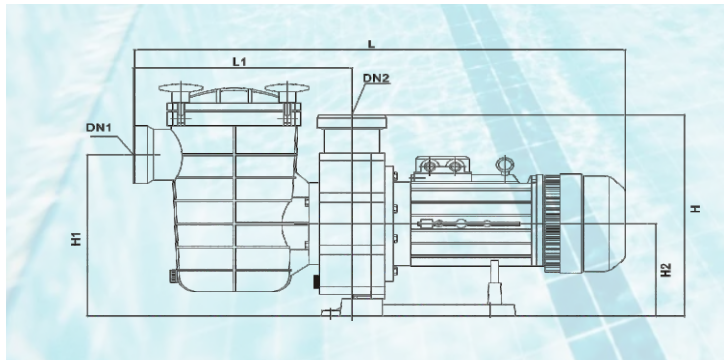


MATERIAL:

1. Self priming pump
2. Injected thermo plastic pump casing
3. Filter basket in white color injected plastic material
4. Prefilter lid in transparent polycarbonate
5. Stainless steel studs
6. Impeller and seal mounting in PPO
7. Motor shaft in stainless steel AISI 420
8. Mechanical seal in graphite and SIC
9. Motor housing in aluminium L2521

MOTOR:

1. Asynchronous, two poles
2. IP 55 protection
3. Class F insulation
4. Continuous operation
5. Single phase version built in thermal protection

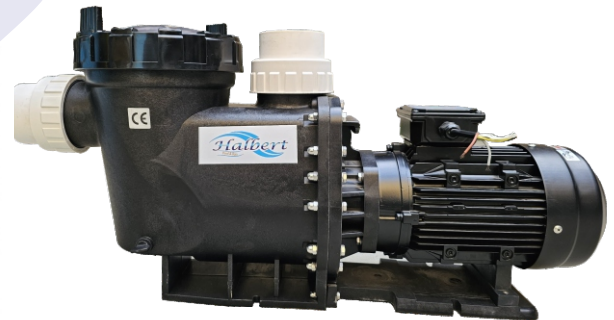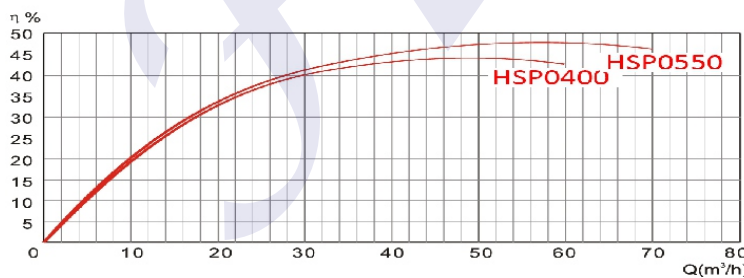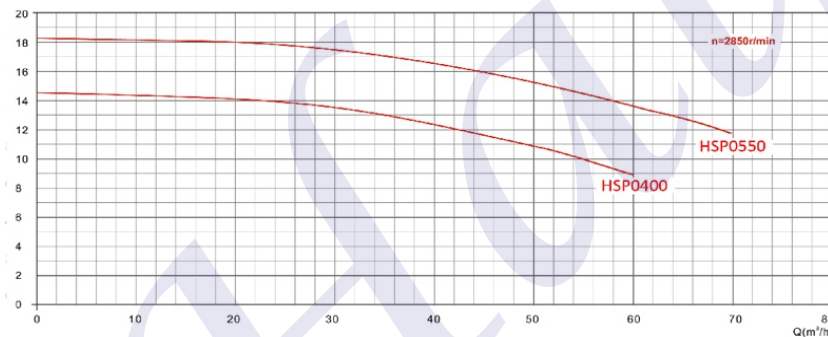

Halbert HS-Series


Model	Qmax (m³/h)	Hmax (m)	V/Hz	Power		Inlet ø D(inch)	Outlet ø E (Inch)
				KW	HP		
HS-40	48	18	380/50	3	4	3.0"/90mm	3.0"/90mm
HS-55	60	19	380/50	4	5.5	3.0"/90mm	3.0"/90mm
HS-75	80	20	380/50	5.5	7.5	3.0"/90mm	3.0"/90mm
HS-100	95	21	380/50	7.5	10	3.0"/90mm	3.0"/90mm
HS-180	110	22	380/50	11	15	3.0"/90mm	3.0"/90mm

Model	HP	KW	V		A		P1(KW)	Q	L/Min	0	333.3	500	666.7	833.3	1000	1166.7
			50HZ	50HZ	220V	380V				1~/3~	m³/h	0	20	30	40	50
HSP0400	4	3	380		6.4		3.6	H(m)		14.5	14.2	13.5	12.6	11	9.5	
HSP0550	5.5	4	380		8.3		4.7			18.2	17.8	11	16.3	16	13.8	12.2

Swimming Pool Pumps

Swim 2/Swim S2 Series Pumps

Swim S2 Series heavy duty pump has delivery high flow and energy efficiency ultra performance it is suitable for commercial or domestic pool. 63mm suction and discharge. Ring lock seal is designed to eliminate suction leaks and maximize suction efficiency.

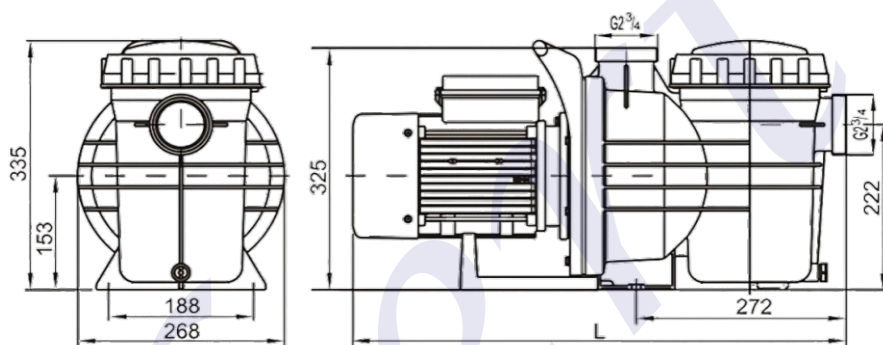

TECHNICAL SPECIFICATIONS

Model	Qmax (l/min)	Hmax (m)	Power(P1)		L		Noise (dBA)
			kW	HP	Single-phase	Three-phase	
SWIM 2-120(T)	350	12.5	0.9	1.2	603	603	62
SWIM 2-150(T)	380	16.5	1.1	1.5	603	603	64
SWIM 2-200(T)	500	20	1.5	2.0	603	603	65
SWIM 2-250(T)	560	19.5	1.85	2.5	603	603	67
SWIM 2-300(T)	600	22	2.2	3.0	616	603	71
SWIM 2-400(T)	650	25	3.0	4.0	640	640	75
SWIM S2-120(T)	350	12.5	0.9	1.2	603	603	62
SWIM S2-150(T)	380	16.5	1.1	1.5	603	603	64
SWIM S2-200(T)	500	20	1.5	2.0	603	603	65
SWIM S2-250(T)	560	19.5	1.85	2.5	603	603	67
SWIM S2-300(T)	600	22	2.2	3.0	616	603	71
SWIM S2-400(T)	650	25	3.0	4.0	640	640	75

Jacuzzi Pump - Spa Pump



MATERIAL:

- Self Priming pump
- Injected thermo plastic pump casing
- Stainless steel studs
- Motor shaft in stainless steel AISI/420
- Impeller in PPO
- Mechanical seal in graphite and ceramic
- Motor housing in aluminum
- Available in 0.5HP, 0.75HP, 1HP, 1.5HP, 2HP, 3HP

MOTOR:

- Built in pneumatic switch for on & off underwater
- Asynchronous, two poles
- IP 55 protection
- Class F insulation



Pool Fittings

Pool Fittings

	<table border="1"> <tr><td>Model No:</td><td>HA-001</td></tr> <tr><td>Wall Return/ Floor Inlet Side Flow</td><td></td></tr> <tr><td>Color: White</td><td></td></tr> <tr><td>Flow Rate: 9M³/hr</td><td></td></tr> <tr><td>Floor inlets Made in White ABS, These are UV resisted and are appreciated for longservice life. Connection 50mm / 63mm</td><td></td></tr> </table>	Model No:	HA-001	Wall Return/ Floor Inlet Side Flow		Color: White		Flow Rate: 9M ³ /hr		Floor inlets Made in White ABS, These are UV resisted and are appreciated for longservice life. Connection 50mm / 63mm			<table border="1"> <tr><td>Model No:</td><td>HA-002</td></tr> <tr><td>Floor Inlet Grill Type</td><td></td></tr> <tr><td>Color: White</td><td></td></tr> <tr><td>Flow Rate: 9M³/hr</td><td></td></tr> <tr><td>Floor inlets side flow system Made in White ABS, These are UV resisted and are appreciated for longer service life. Connection 50mm / 63mm</td><td></td></tr> </table>	Model No:	HA-002	Floor Inlet Grill Type		Color: White		Flow Rate: 9M ³ /hr		Floor inlets side flow system Made in White ABS, These are UV resisted and are appreciated for longer service life. Connection 50mm / 63mm							
Model No:	HA-001																												
Wall Return/ Floor Inlet Side Flow																													
Color: White																													
Flow Rate: 9M ³ /hr																													
Floor inlets Made in White ABS, These are UV resisted and are appreciated for longservice life. Connection 50mm / 63mm																													
Model No:	HA-002																												
Floor Inlet Grill Type																													
Color: White																													
Flow Rate: 9M ³ /hr																													
Floor inlets side flow system Made in White ABS, These are UV resisted and are appreciated for longer service life. Connection 50mm / 63mm																													
	<table border="1"> <tr><td>Model No:</td><td>HA-003</td></tr> <tr><td>Wall Return/Floor Inlet Flower Type</td><td></td></tr> <tr><td>Color: White -</td><td></td></tr> <tr><td>Flow Rate: 9M³/hr</td><td></td></tr> <tr><td>Adjustable Floor inlets Made in White ABS, with multiple flow UV protected appreciated for long life. Connection 50mm / 63mm</td><td></td></tr> </table>	Model No:	HA-003	Wall Return/Floor Inlet Flower Type		Color: White -		Flow Rate: 9M ³ /hr		Adjustable Floor inlets Made in White ABS, with multiple flow UV protected appreciated for long life. Connection 50mm / 63mm			<table border="1"> <tr><td>Model No:</td><td>HA-004</td></tr> <tr><td>Eye Ball Nozzle</td><td></td></tr> <tr><td>Color: White</td><td></td></tr> <tr><td>Flow Rate: 4.5M³/hr</td><td></td></tr> <tr><td>Eye Ball Nozzle inlets Made in White ABS, with multiple flow UV protected appreciated for long life. Connection 50mm / 63mm suitable for 10 & 6 Kg pressure</td><td></td></tr> </table>	Model No:	HA-004	Eye Ball Nozzle		Color: White		Flow Rate: 4.5M ³ /hr		Eye Ball Nozzle inlets Made in White ABS, with multiple flow UV protected appreciated for long life. Connection 50mm / 63mm suitable for 10 & 6 Kg pressure							
Model No:	HA-003																												
Wall Return/Floor Inlet Flower Type																													
Color: White -																													
Flow Rate: 9M ³ /hr																													
Adjustable Floor inlets Made in White ABS, with multiple flow UV protected appreciated for long life. Connection 50mm / 63mm																													
Model No:	HA-004																												
Eye Ball Nozzle																													
Color: White																													
Flow Rate: 4.5M ³ /hr																													
Eye Ball Nozzle inlets Made in White ABS, with multiple flow UV protected appreciated for long life. Connection 50mm / 63mm suitable for 10 & 6 Kg pressure																													
	<table border="1"> <tr><td>Model No:</td><td>HA-005</td></tr> <tr><td>Eye Ball Diffuser Nozzle</td><td></td></tr> <tr><td>Color: White</td><td></td></tr> <tr><td>Flow Rate: 4.5M³/hr</td><td></td></tr> <tr><td>Eye Ball Diffuser Nozzle inlets Made in White ABS, with multiple flow UV protected appreciated for long life. Connection 50mm / 63mm</td><td></td></tr> </table>	Model No:	HA-005	Eye Ball Diffuser Nozzle		Color: White		Flow Rate: 4.5M ³ /hr		Eye Ball Diffuser Nozzle inlets Made in White ABS, with multiple flow UV protected appreciated for long life. Connection 50mm / 63mm			<table border="1"> <tr><td>Model No:</td><td>HA-006</td></tr> <tr><td>Single Hole Jet</td><td></td></tr> <tr><td>Color: White</td><td></td></tr> <tr><td>Flow Rate: 3.5 M³/hr</td><td></td></tr> <tr><td>Connection Size-50mm</td><td></td></tr> <tr><td>Material-ABS</td><td></td></tr> </table>	Model No:	HA-006	Single Hole Jet		Color: White		Flow Rate: 3.5 M ³ /hr		Connection Size-50mm		Material-ABS					
Model No:	HA-005																												
Eye Ball Diffuser Nozzle																													
Color: White																													
Flow Rate: 4.5M ³ /hr																													
Eye Ball Diffuser Nozzle inlets Made in White ABS, with multiple flow UV protected appreciated for long life. Connection 50mm / 63mm																													
Model No:	HA-006																												
Single Hole Jet																													
Color: White																													
Flow Rate: 3.5 M ³ /hr																													
Connection Size-50mm																													
Material-ABS																													
	<table border="1"> <tr><td>Model No:</td><td>HA-007</td></tr> <tr><td>Vaccum Point/Suction Inlet</td><td></td></tr> <tr><td>Color: White</td><td></td></tr> <tr><td>Flow Rate: 4.5M³/hr</td><td></td></tr> <tr><td>Suction inlets Made in White ABS, These are UV resisted and are appreciated for long service life. Connection 63mm</td><td></td></tr> </table>	Model No:	HA-007	Vaccum Point/Suction Inlet		Color: White		Flow Rate: 4.5M ³ /hr		Suction inlets Made in White ABS, These are UV resisted and are appreciated for long service life. Connection 63mm			<table border="1"> <tr><td>Model No:</td><td>HA-008</td></tr> <tr><td>Wall Conduit</td><td></td></tr> <tr><td>Color: White</td><td></td></tr> <tr><td>Size: 63mm Threaded</td><td></td></tr> <tr><td>Material ABS</td><td></td></tr> </table>	Model No:	HA-008	Wall Conduit		Color: White		Size: 63mm Threaded		Material ABS							
Model No:	HA-007																												
Vaccum Point/Suction Inlet																													
Color: White																													
Flow Rate: 4.5M ³ /hr																													
Suction inlets Made in White ABS, These are UV resisted and are appreciated for long service life. Connection 63mm																													
Model No:	HA-008																												
Wall Conduit																													
Color: White																													
Size: 63mm Threaded																													
Material ABS																													
	<table border="1"> <tr><td>Model No:</td><td>HA-009</td></tr> <tr><td>Standard Skimmer</td><td></td></tr> <tr><td>Color: White</td><td></td></tr> <tr><td>Size: 50mm/63mm threaded</td><td></td></tr> <tr><td>Standard Wall Skimmer for Concrete Pool</td><td></td></tr> <tr><td>Material - ABS</td><td></td></tr> </table>	Model No:	HA-009	Standard Skimmer		Color: White		Size: 50mm/63mm threaded		Standard Wall Skimmer for Concrete Pool		Material - ABS			<table border="1"> <tr><td>Model No:</td><td>HA-010</td></tr> <tr><td>Wide Mouth Skimmer</td><td></td></tr> <tr><td>Color: White</td><td></td></tr> <tr><td>Size: 50mm/63mm threaded</td><td></td></tr> <tr><td>Wide Mouth Skimmer for Concrete Pool</td><td></td></tr> <tr><td>Material - ABS</td><td></td></tr> </table>	Model No:	HA-010	Wide Mouth Skimmer		Color: White		Size: 50mm/63mm threaded		Wide Mouth Skimmer for Concrete Pool		Material - ABS			
Model No:	HA-009																												
Standard Skimmer																													
Color: White																													
Size: 50mm/63mm threaded																													
Standard Wall Skimmer for Concrete Pool																													
Material - ABS																													
Model No:	HA-010																												
Wide Mouth Skimmer																													
Color: White																													
Size: 50mm/63mm threaded																													
Wide Mouth Skimmer for Concrete Pool																													
Material - ABS																													
	<table border="1"> <tr><td>Model No:</td><td>HA-011</td></tr> <tr><td>Mini Skimmer</td><td></td></tr> <tr><td>Color: White</td><td></td></tr> <tr><td>Flow Rate: 9M³/hr</td><td></td></tr> <tr><td>Mini Skimmer for Concrete/Vinyl Pool</td><td></td></tr> <tr><td>Material ABS</td><td></td></tr> <tr><td>Connection 1-1/2" Threaded</td><td></td></tr> </table>	Model No:	HA-011	Mini Skimmer		Color: White		Flow Rate: 9M ³ /hr		Mini Skimmer for Concrete/Vinyl Pool		Material ABS		Connection 1-1/2" Threaded			<table border="1"> <tr><td>Model No:</td><td>HA-012</td></tr> <tr><td>Square Main Drain</td><td></td></tr> <tr><td>Color: White</td><td></td></tr> <tr><td>Flow Rate: 850L / Min</td><td></td></tr> <tr><td>Squire Main Drian 300mm X 300mm</td><td></td></tr> <tr><td>Material-ABS</td><td></td></tr> </table>	Model No:	HA-012	Square Main Drain		Color: White		Flow Rate: 850L / Min		Squire Main Drian 300mm X 300mm		Material-ABS	
Model No:	HA-011																												
Mini Skimmer																													
Color: White																													
Flow Rate: 9M ³ /hr																													
Mini Skimmer for Concrete/Vinyl Pool																													
Material ABS																													
Connection 1-1/2" Threaded																													
Model No:	HA-012																												
Square Main Drain																													
Color: White																													
Flow Rate: 850L / Min																													
Squire Main Drian 300mm X 300mm																													
Material-ABS																													
	<table border="1"> <tr><td>Model No:</td><td>HA-013</td></tr> <tr><td>Squire Main Drain</td><td></td></tr> <tr><td>Color: Chrome Finish</td><td></td></tr> <tr><td>Flow Rate: 850 L/min</td><td></td></tr> <tr><td>Size: 300mm X 300mm</td><td></td></tr> <tr><td>450mm X 450mm</td><td></td></tr> <tr><td>Material Stainless Steel</td><td></td></tr> </table>	Model No:	HA-013	Squire Main Drain		Color: Chrome Finish		Flow Rate: 850 L/min		Size: 300mm X 300mm		450mm X 450mm		Material Stainless Steel			<table border="1"> <tr><td>Model No:</td><td>HA-014</td></tr> <tr><td>Circular Main Drain</td><td></td></tr> <tr><td>Color: White</td><td></td></tr> <tr><td>Flow Rate: 63mm</td><td></td></tr> <tr><td>Circular ABS Main Drain for Concrete Pool</td><td></td></tr> <tr><td>w/170mm in Diameter & 2" int.r</td><td></td></tr> </table>	Model No:	HA-014	Circular Main Drain		Color: White		Flow Rate: 63mm		Circular ABS Main Drain for Concrete Pool		w/170mm in Diameter & 2" int.r	
Model No:	HA-013																												
Squire Main Drain																													
Color: Chrome Finish																													
Flow Rate: 850 L/min																													
Size: 300mm X 300mm																													
450mm X 450mm																													
Material Stainless Steel																													
Model No:	HA-014																												
Circular Main Drain																													
Color: White																													
Flow Rate: 63mm																													
Circular ABS Main Drain for Concrete Pool																													
w/170mm in Diameter & 2" int.r																													


Pool Fittings

Pool Fittings

	Model No:	HMDC-01		Model No:	HFRI-01
	Main Drain Cover			Floor Return Inlet	
	Color: White			Color: White	
	Flow Rate: 750 L/min			Flow Rate: 9M ³ /hr	
<p>Made in White ABS, These are UV resisted and are appreciated for long service life. Diameter Front - 176mm Diameter Back - 190mm</p>			<p>Floor Return inlets with adjustable flow Made in White ABS, These are UV resisted and are appreciated for longer service life. Connection 63mm</p>		
	Model No:	HA-004 (Blue)		Model No:	HA-004 (Black)
	Eye Ball Nozzle - Blue			Eye Ball Nozzle - Black	
	Color: Blue			Color: Black	
	Flow Rate: 4.5M ³ /hr			Flow Rate: 4.5M ³ /hr	
<p>Eye Ball Nozzle inlets Made in Blue ABS, with multiple flow, UV protected, appreciated for long life. Connection 50mm / 63mm suitable for 10 & 6 Kg pressure</p>			<p>Eye Ball Nozzle inlets Made in Black ABS, with multiple flow UV protected appreciated for long life. Connection 50mm / 63mm suitable for 10 & 6 Kg pressure</p>		
	Model No:	HA-004 (Threaded)		Model No:	HA-003 (Threaded)
	Eye Ball Inlet Threaded			Flow Inlet (Flower Type) Threaded	
	Color: White			Color: White	
	Flow Rate: 4.5M ³ /hr			Flow Rate: 9M ³ /hr	
<p>Eye Ball Nozzle inlets Made in ABS, with multiple flow, UV protected, appreciated for long life. Connection 63mm suitable for 10 & 6 Kg pressure</p>			<p>Adjustable Floor inlets Made in White ABS, with multiple flow UV protected appreciated for long life. Connection 50mm / 63mm</p>		



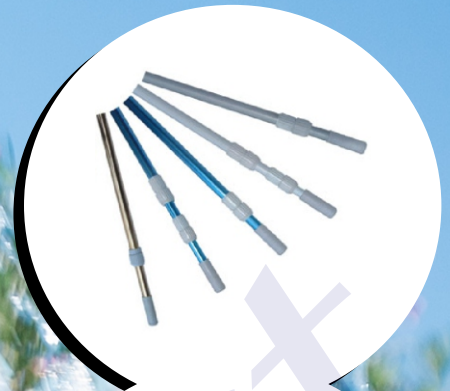

POOL CLEANING EQUIPMENT





Pool Cleaning Equipment


Pool Cleaning Equipment


	Model No:	HA-015
	Description	
	Standard Curved Poly Bristle Wall Brush - 18"	
	Standard Packing	1
	Weight (KG)	200gm
	Size	18"


	Model No:	HA-016
	Description	
	Poly Bristle Wall Brush - 10"	
	Standard Packing	1
	Weight (KG)	125gm
	Size	10"


	Model No:	HA-017
	Description	
	Deluxe Stainless Steel Algae Brush 18"	
	Standard Packing	1
	Weight (KG)	-
	Size	18"

	Model No:	HA-018
	Description	
	Hi-grade Stainless Steel Algae Brush - 10"	
	Standard Packing	1
	Weight (KG)	190gm
	Size	10"


	Model No:	HA-019
	Description	
	Poly Bristle Wall Brush with Aluminium back handle - 18"	
	Standard Packing	1
	Weight (KG)	320gm
	Size	18"


	Model No:	HA-020
	Description	
	Stainless Steel Algae Brush with Aluminium back 18"	
	Standard Packing	1
	Weight (KG)	367gm
	Size	18"


	Model No:	HA-021
	Description	
	20" / 50 cm Flexible Poly Bristle Brush with Alu Handle	
	Standard Packing	1
	Weight (KG)	-
	Size	20"


	Model No:	HA-022
	Description	
	20" / 50 cm Flexible Nylon Bristle Brush with Alu Handle	
	Standard Packing	1
	Weight (KG)	-
	Size	20"


	Model No:	HA-023
	Description	
	Deluxe Liner VAC head with bumper cast iron weight	
	Standard Packing	1
	Weight (KG)	710gm
	Size	14"

	Model No:	HA-024
	Description	
	Deluxe Large VAC head cast iron weight	
	Standard Packing	1
	Weight (KG)	710gm
	Size	14"

	Model No:	HA-025
	Description	
	Deluxe Large VAC head cast iron weight with side brush	
	Standard Packing	1
	Weight (KG)	720gm
	Size	14"


	Model No:	HA-026
	Description	
	Vacuum head with 4 wheels, alu body - 14"	
	Standard Packing	1
	Weight (KG)	2.20kgs
	Size	14"


	Model No:	HA-027
	Description	
	Vacuum head with 4 wheels, alu body - 18"	
	Standard Packing	1
	Weight (KG)	2.73kgs
	Size	18"


	Model No:	HA-028
	Description	
	Suction head with 4 wheels in stainless steel (Available in different Sizes)	
	Standard Packing	1
	Size	300mm, 450mm 600mm


Pool Cleaning Equipment


Pool Cleaning Equipment


	Model No:	HA-029
	Description	
	Flexible vacuum head for in ground pools with 12 wheels	
	Standard Packing	1
	Weight (KG)	-
Size	18"	


	Model No:	HA-030
	Description	
	Flexible vacuum head for in ground pools with 8 wheels	
	Standard Packing	1
	Weight (KG)	1.25kgs
Size	14"	


	Model No:	HA-031
	Description	
	Vacuum brush with swivel "	
	Standard Packing	1
	Weight (KG)	-
Size	18"	


	Model No:	HA-032
	Description	
	Triangular Liner VAC head with swivel	
	Standard Packing	1
	Weight (KG)	-
Size	14"	


	Model No:	HA-033
	Description	
	Deluxe Triangular transparent VAC head	
	Standard Packing	1
	Weight (KG)	1.3kgs
Size	14"	


	Model No:	HA-034
	Description	
	Flexible vacuum head with side brush for in ground pool	
	Standard Packing	1
	Weight (KG)	1.1kgs
Size	14"	


	Model No:	HA-035
	Description	
	Flexible Vacuum Head W/8 Wheel	
	Standard Packing	1
	Weight (KG)	1.1kgs
Size	14"	


	Model No:	HA-036
	Description	
	Vacuum Head W/Air Relief Valve	
	Standard Packing	1
	Weight (KG)	-
Size	14"	


	Model No:	HA-037
	Description	
	Suction Head	
	Standard Packing	1
	Material	Stainless Steel
Size	2feet / 3feet	

	Model No:	HA-038
	Description	
	Heavy Duty plastic leaf skimmer with Long wearing Mesh	
	Standard Packing	1
	Weight (KG)	-
Series	Deluxe	

	Model No:	HA-039
	Description	
	Aluminium frame deep rake with blue anodized handle	
	Standard Packing	1
	Weight (KG)	-
Frame	Aluminium	


	Model No:	HA-040
	Description	
	Aluminium Leaf Skimmer (Blue Handle)	
	Standard Packing	1
	Weight (KG)	-
Frame	Aluminium	


	Model No:	HA-041
	Description	
	Economy deep bag skimmer	
	Standard Packing	1
	Weight (KG)	-
Size(mm)	17x8x14	

	Model No:	HA-042
	Description	
	Deluxe New Design Deep Rake, Australian Quality	
	Standard Packing	1
	Weight (KG)	-
Mesh	Blue	


Pool Cleaning Equipment


Pool Cleaning Equipment


	Model No:	HA-043
	Description	
	Deluxe Pool Leaf Rake Green Color	
	Standard Packing	1
	Handle	Lock Type
	Mesh	White


	Model No:	HA-044
	Description	
	Heavy Duty Deep Rake W/Alu 6608bu/ls 160b/ls 10b	
	Frame	Alu Golden
	Weight (KG)	-
	Mesh	Black


	Model No:	HA-045
	Description	
	Super Professional Heavy Duty Aluminium leaf Skimmers	
	Standard Packing	1
	Weight (KG)	-
	Color	Golden Handle


	Model No:	HA-046
	Description	
	Super Professional Heavy Duty Aluminium leaf Skimmers	
	Standard Packing	1
	Weight (KG)	-
	Color	Golden Handle


	Model No:	HA-047
	Description	
	Best Heavy Aluminium Tube Frame Leaf Rake	
	Standard Packing	1
	Weight (KG)	-
	Color	Golden Handle


	Model No:	HA-048
	Description	
	Best Heavy Aluminium Tube Frame Leaf Rake	
	Standard Packing	1
	Weight (KG)	-
	Color	Golden Handle


	Model No:	HA-049
	Description	
	Heavy Duty Leaf Skimmer	
	Standard Packing	1
	Weight (KG)	-
	Type	Flate


	Model No:	HA-050
	Description	
	Extruded PE Vacuum Hose-15mtr	
	Standard Packing	1
	Weight (KG)	3.00 kgs
	Quality	PE


	Model No:	HA-051
	Description	
	EVA Spiral Vacuum Hose-15mtr	
	Standard Packing	1
	Weight (KG)	3.200 kg
	Quality	EVA

	Model No:	HA-052
	Description	
	Hose Reel for Vacuum Hose	
	Standard Packing	1
	Weight (KG)	-
	Material	PVC

	Model No:	HA-053
	Description	
	Basic PH & CI test Kit	
	Standard Packing	1
	Phinol Red	15ml
	Orthotodiline	15ml

	Model No:	HA-054
	Description	
	2.4m Ribbed Pole/Telescopic Pole-1.1mm 1.2mm, Thickness/Blue/Silver	
	Standard Packing	1
	Weight (KG)	-
	Size(m)	(2 X 1.2)

	Model No:	HA-055
	Description	
	4.8m Ribbed Pole/Telescopic Pole-1.1mm, 1.2mm, Thickness/Blue/Silver	
	Standard Packing	1
	Weight (KG)	-
	Size(m)	2 X 2.4

	Model No:	HA-056
	Description	
	Ribbed Pole/Telescopic Pole 7.2m 1.1mm, 1.2mm, Thickness/Blue/Silver	
	Standard Packing	1
	Weight (KG)	-
	Size(m)	2 X 3.6

Pool Cleaning Equipment

Automatic Pool Cleaner / Robotic Pool Cleaner



Aqua Clean Robotic Cleaner utilizes Aqua Smart system technology which drives the cleaner to efficiently clean the entire pool every time. Residential pools up to 860 ft.² are thoroughly scrubbed, cleaned and filtered in just 90 minutes.

- Cleans all surface types
- Climbs wall and obstacles
- Scrubs waterline
- PVA brushes for superior grip
- No installation required
- Low maintenance
- Clean filter bag indicator (115V model only)
- Convenient caddy option available
- Pump motor - 24V - DC high speed submersible
- Drive motor - 24V - DC high speed submersible

Automatic Swimming Pool Accessories Cleaning Robot Vacuum Cleaner

CLEANING:

- Cleans, vacuums and stores wastes and dirt thanks to its great filter bag
- Easy to clean
- Optimized cleaning time for floor / wall / water line

REMOTE CONTROL:

- Can be started or stopped remotely
- Anti-jamming side domes:
- Side domes allow the cleaning of hard to reach corners
- Prevent the robot from getting stuck in certain angles and any contact between the body and the liner



Kwadoo



ICH Robot



Kreepy Krauly Pool Cleaner

Suction Sweeper Machine Complete Unit



We offer our clients with a qualitative range of Swimming Pool Suction Sweeper Set. Being in accordance with the required industry standards, these machines are widely used in various swimming pools. These are also stringently checked on various parameters to ensure its durability and longer functional life. Moreover, these are acclaimed by our clients for features such as:

- ✂ Motor Pump 1HP | 1.5HP | 2HP | 3HP
- ✂ Electrical Wire 20 Mtr.
- ✂ On/Off Starter
- ✂ SS Trolley
- ✂ Easy for Operation
- ✂ Prefilter Basket



SWIMMING POOL UNDERWATER LIGHTS






UNDERWATER LIGHTS/ LIGHTING

Underwater Lights - Swimming Pool | Fountain

	<table border="1"> <tr><td>Model No:</td><td>HA-057</td></tr> <tr><td colspan="2">Led Under Water Light (ABS)</td></tr> <tr><td colspan="2">Diameter-250mm</td></tr> <tr><td colspan="2">Material-ABS, Thickness-68mm</td></tr> <tr><td colspan="2">IP - 68, Surface Mount</td></tr> <tr><td colspan="2">High Quality Electrical Cable 1m</td></tr> <tr><td colspan="2">Volts/Watts: 12V/10W/20W</td></tr> <tr><td colspan="2">Led Color: Warm/Cool White/Blue/RGB</td></tr> </table>	Model No:	HA-057	Led Under Water Light (ABS)		Diameter-250mm		Material-ABS, Thickness-68mm		IP - 68, Surface Mount		High Quality Electrical Cable 1m		Volts/Watts: 12V/10W/20W		Led Color: Warm/Cool White/Blue/RGB			<table border="1"> <tr><td>Model No:</td><td>HA-058</td></tr> <tr><td colspan="2">Under Water Light (Halogen)</td></tr> <tr><td colspan="2">ABS Under Water Light (Halogen)</td></tr> <tr><td colspan="2">Diameter-290mm</td></tr> <tr><td colspan="2">IP-68</td></tr> <tr><td colspan="2">Volts/Watts: 12V/100W</td></tr> <tr><td colspan="2">Light Color: Warm White</td></tr> </table>	Model No:	HA-058	Under Water Light (Halogen)		ABS Under Water Light (Halogen)		Diameter-290mm		IP-68		Volts/Watts: 12V/100W		Light Color: Warm White			
Model No:	HA-057																																		
Led Under Water Light (ABS)																																			
Diameter-250mm																																			
Material-ABS, Thickness-68mm																																			
IP - 68, Surface Mount																																			
High Quality Electrical Cable 1m																																			
Volts/Watts: 12V/10W/20W																																			
Led Color: Warm/Cool White/Blue/RGB																																			
Model No:	HA-058																																		
Under Water Light (Halogen)																																			
ABS Under Water Light (Halogen)																																			
Diameter-290mm																																			
IP-68																																			
Volts/Watts: 12V/100W																																			
Light Color: Warm White																																			
	<table border="1"> <tr><td>Model No:</td><td>HA-059</td></tr> <tr><td colspan="2">Led Under Water Light (SS)</td></tr> <tr><td colspan="2">Diameter-240mm</td></tr> <tr><td colspan="2">Material-SS 304, Thickness-62mm</td></tr> <tr><td colspan="2">IP-68, Surface Mount</td></tr> <tr><td colspan="2">High Quality Electrical Cable 1m</td></tr> <tr><td colspan="2">Volts/Watts: 12V/10/20W</td></tr> <tr><td colspan="2">Led Color: Warm/Cool White/RGB/Blue</td></tr> </table>	Model No:	HA-059	Led Under Water Light (SS)		Diameter-240mm		Material-SS 304, Thickness-62mm		IP-68, Surface Mount		High Quality Electrical Cable 1m		Volts/Watts: 12V/10/20W		Led Color: Warm/Cool White/RGB/Blue			<table border="1"> <tr><td>Model No:</td><td>HA-060</td></tr> <tr><td colspan="2">Under Water Light (LED)</td></tr> <tr><td colspan="2">ABS Under Water Light (LED)</td></tr> <tr><td colspan="2">Diameter-290mm</td></tr> <tr><td colspan="2">IP-68</td></tr> <tr><td colspan="2">Volts/Watts: 12V/10W/18W/20W</td></tr> <tr><td colspan="2">Led Color: Warm/Cool White/RGB</td></tr> </table>	Model No:	HA-060	Under Water Light (LED)		ABS Under Water Light (LED)		Diameter-290mm		IP-68		Volts/Watts: 12V/10W/18W/20W		Led Color: Warm/Cool White/RGB			
Model No:	HA-059																																		
Led Under Water Light (SS)																																			
Diameter-240mm																																			
Material-SS 304, Thickness-62mm																																			
IP-68, Surface Mount																																			
High Quality Electrical Cable 1m																																			
Volts/Watts: 12V/10/20W																																			
Led Color: Warm/Cool White/RGB/Blue																																			
Model No:	HA-060																																		
Under Water Light (LED)																																			
ABS Under Water Light (LED)																																			
Diameter-290mm																																			
IP-68																																			
Volts/Watts: 12V/10W/18W/20W																																			
Led Color: Warm/Cool White/RGB																																			
	<table border="1"> <tr><td>Model No:</td><td>HA-061</td></tr> <tr><td colspan="2">Led Under Water Light (SS)</td></tr> <tr><td colspan="2">Diameter-150mm</td></tr> <tr><td colspan="2">Material-SS 304, Thickness-25mm</td></tr> <tr><td colspan="2">IP-68, ABS Blue Ring Top, Surface Mount</td></tr> <tr><td colspan="2">High Quality Electrical Cable 1m</td></tr> <tr><td colspan="2">Volts/Watts: 12V/10W/20W</td></tr> <tr><td colspan="2">Led Color: Warm/Cool White/RGB/Blue</td></tr> </table>	Model No:	HA-061	Led Under Water Light (SS)		Diameter-150mm		Material-SS 304, Thickness-25mm		IP-68, ABS Blue Ring Top, Surface Mount		High Quality Electrical Cable 1m		Volts/Watts: 12V/10W/20W		Led Color: Warm/Cool White/RGB/Blue			<table border="1"> <tr><td>Model No:</td><td>HA-062</td></tr> <tr><td colspan="2">Led Under Water Light (SS)</td></tr> <tr><td colspan="2">Diameter-150mm</td></tr> <tr><td colspan="2">Led Type SMD</td></tr> <tr><td colspan="2">Material SS 304</td></tr> <tr><td colspan="2">IP-68</td></tr> <tr><td colspan="2">Volts/Watts: 12V/10W/20W</td></tr> <tr><td colspan="2">Led Color: Warm /Cool white</td></tr> </table>	Model No:	HA-062	Led Under Water Light (SS)		Diameter-150mm		Led Type SMD		Material SS 304		IP-68		Volts/Watts: 12V/10W/20W		Led Color: Warm /Cool white	
Model No:	HA-061																																		
Led Under Water Light (SS)																																			
Diameter-150mm																																			
Material-SS 304, Thickness-25mm																																			
IP-68, ABS Blue Ring Top, Surface Mount																																			
High Quality Electrical Cable 1m																																			
Volts/Watts: 12V/10W/20W																																			
Led Color: Warm/Cool White/RGB/Blue																																			
Model No:	HA-062																																		
Led Under Water Light (SS)																																			
Diameter-150mm																																			
Led Type SMD																																			
Material SS 304																																			
IP-68																																			
Volts/Watts: 12V/10W/20W																																			
Led Color: Warm /Cool white																																			
	<table border="1"> <tr><td>Model No:</td><td>HA-063</td></tr> <tr><td colspan="2">Led Under Water Light (SS)</td></tr> <tr><td colspan="2">Diameter-150mm</td></tr> <tr><td colspan="2">Material-SS 304</td></tr> <tr><td colspan="2">IP-68, ABS White Ring Top, Surface Mount</td></tr> <tr><td colspan="2">High Quality Electrical Cable 1m</td></tr> <tr><td colspan="2">Volts/Watts: 12V/10W/20W</td></tr> <tr><td colspan="2">Led Color: Warm/Cool White/RGB/Blue</td></tr> </table>	Model No:	HA-063	Led Under Water Light (SS)		Diameter-150mm		Material-SS 304		IP-68, ABS White Ring Top, Surface Mount		High Quality Electrical Cable 1m		Volts/Watts: 12V/10W/20W		Led Color: Warm/Cool White/RGB/Blue			<table border="1"> <tr><td>Model No:</td><td>HA-064</td></tr> <tr><td colspan="2">Fountain Under Water Light</td></tr> <tr><td colspan="2">Diameter-150mm, 175mm</td></tr> <tr><td colspan="2">Material-SS 304</td></tr> <tr><td colspan="2">IP-68</td></tr> <tr><td colspan="2">Volts/Watts: 12V/18W/27W</td></tr> <tr><td colspan="2">Led Color: Warm/Cool White/RGB</td></tr> </table>	Model No:	HA-064	Fountain Under Water Light		Diameter-150mm, 175mm		Material-SS 304		IP-68		Volts/Watts: 12V/18W/27W		Led Color: Warm/Cool White/RGB			
Model No:	HA-063																																		
Led Under Water Light (SS)																																			
Diameter-150mm																																			
Material-SS 304																																			
IP-68, ABS White Ring Top, Surface Mount																																			
High Quality Electrical Cable 1m																																			
Volts/Watts: 12V/10W/20W																																			
Led Color: Warm/Cool White/RGB/Blue																																			
Model No:	HA-064																																		
Fountain Under Water Light																																			
Diameter-150mm, 175mm																																			
Material-SS 304																																			
IP-68																																			
Volts/Watts: 12V/18W/27W																																			
Led Color: Warm/Cool White/RGB																																			
	<table border="1"> <tr><td>Model No:</td><td>HA-065</td></tr> <tr><td colspan="2">Led Under Water Light</td></tr> <tr><td colspan="2">Diameter-100mm</td></tr> <tr><td colspan="2">Material-SS 304</td></tr> <tr><td colspan="2">IP-68, Surface Mount</td></tr> <tr><td colspan="2">Volts/Watts: 12V/10W/12W/18W/20W</td></tr> <tr><td colspan="2">Led Color: Warm/Cool White/RGB/Blue</td></tr> </table>	Model No:	HA-065	Led Under Water Light		Diameter-100mm		Material-SS 304		IP-68, Surface Mount		Volts/Watts: 12V/10W/12W/18W/20W		Led Color: Warm/Cool White/RGB/Blue			<table border="1"> <tr><td>Model No:</td><td>HA-066</td></tr> <tr><td colspan="2">LED Under Water Light</td></tr> <tr><td colspan="2">Diameter-190mm</td></tr> <tr><td colspan="2">Thickness-32mm, Material-ABS</td></tr> <tr><td colspan="2">IP-68, 100% Water Proof</td></tr> <tr><td colspan="2">Electrical Cable 1 mtr</td></tr> <tr><td colspan="2">Volts/Watts: 12V/12,14,18,20W</td></tr> <tr><td colspan="2">Led Color : Warm/Cool white</td></tr> </table>	Model No:	HA-066	LED Under Water Light		Diameter-190mm		Thickness-32mm, Material-ABS		IP-68, 100% Water Proof		Electrical Cable 1 mtr		Volts/Watts: 12V/12,14,18,20W		Led Color : Warm/Cool white			
Model No:	HA-065																																		
Led Under Water Light																																			
Diameter-100mm																																			
Material-SS 304																																			
IP-68, Surface Mount																																			
Volts/Watts: 12V/10W/12W/18W/20W																																			
Led Color: Warm/Cool White/RGB/Blue																																			
Model No:	HA-066																																		
LED Under Water Light																																			
Diameter-190mm																																			
Thickness-32mm, Material-ABS																																			
IP-68, 100% Water Proof																																			
Electrical Cable 1 mtr																																			
Volts/Watts: 12V/12,14,18,20W																																			
Led Color : Warm/Cool white																																			
	<table border="1"> <tr><td>Model No:</td><td>HA-067</td></tr> <tr><td colspan="2">Led Under Water Light</td></tr> <tr><td colspan="2">Diameter-100mm</td></tr> <tr><td colspan="2">Thickness-20mm</td></tr> <tr><td colspan="2">Material-ABS</td></tr> <tr><td colspan="2">IP-68, Surface Mount</td></tr> <tr><td colspan="2">Volts/Watts: 12V/9W/10W</td></tr> <tr><td colspan="2">Led Color: Warm/White/RGB/Blue</td></tr> </table>	Model No:	HA-067	Led Under Water Light		Diameter-100mm		Thickness-20mm		Material-ABS		IP-68, Surface Mount		Volts/Watts: 12V/9W/10W		Led Color: Warm/White/RGB/Blue			<table border="1"> <tr><td>Model No:</td><td>HA-068</td></tr> <tr><td colspan="2">Led Under Water Light</td></tr> <tr><td colspan="2">Diameter-167mm</td></tr> <tr><td colspan="2">Thickness-22.5mm</td></tr> <tr><td colspan="2">Material ABS, Led Type-SMD</td></tr> <tr><td colspan="2">High Quality Electrical Cable 1m</td></tr> <tr><td colspan="2">Volts/Watts: 12V/10W/12W/20W/24W</td></tr> <tr><td colspan="2">Led Color: Warm, White, Blue and RGB</td></tr> </table>	Model No:	HA-068	Led Under Water Light		Diameter-167mm		Thickness-22.5mm		Material ABS, Led Type-SMD		High Quality Electrical Cable 1m		Volts/Watts: 12V/10W/12W/20W/24W		Led Color: Warm, White, Blue and RGB	
Model No:	HA-067																																		
Led Under Water Light																																			
Diameter-100mm																																			
Thickness-20mm																																			
Material-ABS																																			
IP-68, Surface Mount																																			
Volts/Watts: 12V/9W/10W																																			
Led Color: Warm/White/RGB/Blue																																			
Model No:	HA-068																																		
Led Under Water Light																																			
Diameter-167mm																																			
Thickness-22.5mm																																			
Material ABS, Led Type-SMD																																			
High Quality Electrical Cable 1m																																			
Volts/Watts: 12V/10W/12W/20W/24W																																			
Led Color: Warm, White, Blue and RGB																																			
	<table border="1"> <tr><td>Model No:</td><td>HA-069</td></tr> <tr><td colspan="2">Fountain Led Under Water Light</td></tr> <tr><td colspan="2">Diameter-100mm, Material-ABS</td></tr> <tr><td colspan="2">Stand Type, Height With Stand-142mm</td></tr> <tr><td colspan="2">Thickness-23mm, Niche Dia-80mm</td></tr> <tr><td colspan="2">IP-68</td></tr> <tr><td colspan="2">Volts/Watts: 12V / 9W DC</td></tr> <tr><td colspan="2">Led Color: Warm/Cool White/RGB</td></tr> </table>	Model No:	HA-069	Fountain Led Under Water Light		Diameter-100mm, Material-ABS		Stand Type, Height With Stand-142mm		Thickness-23mm, Niche Dia-80mm		IP-68		Volts/Watts: 12V / 9W DC		Led Color: Warm/Cool White/RGB			<table border="1"> <tr><td>Model No:</td><td>HA-070</td></tr> <tr><td colspan="2">Solar Floating Pool Light (colorful)</td></tr> <tr><td colspan="2">Type - Floating without wire</td></tr> <tr><td colspan="2">Volts/Watts: -</td></tr> <tr><td colspan="2">Led Color: Warm, White, Blue and RGB</td></tr> </table>	Model No:	HA-070	Solar Floating Pool Light (colorful)		Type - Floating without wire		Volts/Watts: -		Led Color: Warm, White, Blue and RGB							
Model No:	HA-069																																		
Fountain Led Under Water Light																																			
Diameter-100mm, Material-ABS																																			
Stand Type, Height With Stand-142mm																																			
Thickness-23mm, Niche Dia-80mm																																			
IP-68																																			
Volts/Watts: 12V / 9W DC																																			
Led Color: Warm/Cool White/RGB																																			
Model No:	HA-070																																		
Solar Floating Pool Light (colorful)																																			
Type - Floating without wire																																			
Volts/Watts: -																																			
Led Color: Warm, White, Blue and RGB																																			

UNDERWATER LIGHTS/ LIGHTING

Underwater Lights - Swimming Pool | Fountain

	<table border="1"> <tr><td>Model No:</td><td>HA-071</td></tr> <tr><td colspan="2">Fountain LED Under Water Light</td></tr> <tr><td colspan="2">Round Dia-160mm Angle 30-45 deg. Material SS 304, IP-68 with stand</td></tr> <tr><td colspan="2">Volts/Watts: 12V/27W</td></tr> <tr><td colspan="2">Light: Warm/Cool White/ Multi Color</td></tr> </table>	Model No:	HA-071	Fountain LED Under Water Light		Round Dia-160mm Angle 30-45 deg. Material SS 304, IP-68 with stand		Volts/Watts: 12V/27W		Light: Warm/Cool White/ Multi Color			<table border="1"> <tr><td>Model No:</td><td>HA-072</td></tr> <tr><td colspan="2">Fountain Under Water Light</td></tr> <tr><td colspan="2">100% Waterproof Round Dia 140/150mm Angle 30-45 deg, IP-68</td></tr> <tr><td colspan="2">Volts/Watts: 12V/36W</td></tr> <tr><td colspan="2">Light: Warm/Cool White/ Multi Color</td></tr> </table>	Model No:	HA-072	Fountain Under Water Light		100% Waterproof Round Dia 140/150mm Angle 30-45 deg, IP-68		Volts/Watts: 12V/36W		Light: Warm/Cool White/ Multi Color	
Model No:	HA-071																						
Fountain LED Under Water Light																							
Round Dia-160mm Angle 30-45 deg. Material SS 304, IP-68 with stand																							
Volts/Watts: 12V/27W																							
Light: Warm/Cool White/ Multi Color																							
Model No:	HA-072																						
Fountain Under Water Light																							
100% Waterproof Round Dia 140/150mm Angle 30-45 deg, IP-68																							
Volts/Watts: 12V/36W																							
Light: Warm/Cool White/ Multi Color																							
	<table border="1"> <tr><td>Model No:</td><td>HA-073</td></tr> <tr><td colspan="2">Fountain Led Light</td></tr> <tr><td colspan="2">Material SS 304 Round dia 75mm IP-68 Stand Type</td></tr> <tr><td colspan="2">Volts/Watts: 12V/9W</td></tr> <tr><td colspan="2">Light: Warm/Cool White/ Multi Color</td></tr> </table>	Model No:	HA-073	Fountain Led Light		Material SS 304 Round dia 75mm IP-68 Stand Type		Volts/Watts: 12V/9W		Light: Warm/Cool White/ Multi Color			<table border="1"> <tr><td>Model No:</td><td>HA-074</td></tr> <tr><td colspan="2">Fountain Led Light</td></tr> <tr><td colspan="2">Angle 30 deg IP-68, Round dia 75mm Material SS 304</td></tr> <tr><td colspan="2">Volts/Watts: 12V/9W</td></tr> <tr><td colspan="2">Light: Warm/Cool White/ Multi Color</td></tr> </table>	Model No:	HA-074	Fountain Led Light		Angle 30 deg IP-68, Round dia 75mm Material SS 304		Volts/Watts: 12V/9W		Light: Warm/Cool White/ Multi Color	
Model No:	HA-073																						
Fountain Led Light																							
Material SS 304 Round dia 75mm IP-68 Stand Type																							
Volts/Watts: 12V/9W																							
Light: Warm/Cool White/ Multi Color																							
Model No:	HA-074																						
Fountain Led Light																							
Angle 30 deg IP-68, Round dia 75mm Material SS 304																							
Volts/Watts: 12V/9W																							
Light: Warm/Cool White/ Multi Color																							
	<table border="1"> <tr><td>Model No:</td><td>HA-075</td></tr> <tr><td colspan="2">Fountain Led Light</td></tr> <tr><td colspan="2">Material SS 304 Angle 30 deg Round dia-75mm, IP-68</td></tr> <tr><td colspan="2">Volts/Watts: 12V/9W</td></tr> <tr><td colspan="2">Light: Warm/Cool White/ Multi Color</td></tr> </table>	Model No:	HA-075	Fountain Led Light		Material SS 304 Angle 30 deg Round dia-75mm, IP-68		Volts/Watts: 12V/9W		Light: Warm/Cool White/ Multi Color			<table border="1"> <tr><td>Model No:</td><td>HA-076</td></tr> <tr><td colspan="2">Mini Led Light</td></tr> <tr><td colspan="2">ABS Mini Led Light With 3 LEDs</td></tr> <tr><td colspan="2">Volts/Watts: 12V/3W</td></tr> <tr><td colspan="2">Light: Warm/Cool White/RGB</td></tr> </table>	Model No:	HA-076	Mini Led Light		ABS Mini Led Light With 3 LEDs		Volts/Watts: 12V/3W		Light: Warm/Cool White/RGB	
Model No:	HA-075																						
Fountain Led Light																							
Material SS 304 Angle 30 deg Round dia-75mm, IP-68																							
Volts/Watts: 12V/9W																							
Light: Warm/Cool White/ Multi Color																							
Model No:	HA-076																						
Mini Led Light																							
ABS Mini Led Light With 3 LEDs																							
Volts/Watts: 12V/3W																							
Light: Warm/Cool White/RGB																							
	<table border="1"> <tr><td>Model No:</td><td>HA-077</td></tr> <tr><td colspan="2">Fountain Led Light (Nozzle Mount)</td></tr> <tr><td colspan="2">Round Dia 150mm Angle 30-45 Material SS 304 IP-68</td></tr> <tr><td colspan="2">Volts/Watts: 12V/3wt</td></tr> <tr><td colspan="2">Light: Warm/Cool White/ Multi Color</td></tr> </table>	Model No:	HA-077	Fountain Led Light (Nozzle Mount)		Round Dia 150mm Angle 30-45 Material SS 304 IP-68		Volts/Watts: 12V/3wt		Light: Warm/Cool White/ Multi Color			<table border="1"> <tr><td>Model No:</td><td>HA-078</td></tr> <tr><td colspan="2">Fountain Led Light (Nozzle Mount)</td></tr> <tr><td colspan="2">Round dia 100mm Material SS 304 Angle 30 IP-68</td></tr> <tr><td colspan="2">Volts/Watts: 12V/18Wt</td></tr> <tr><td colspan="2">Light: Warm/Cool White/ Multi Color</td></tr> </table>	Model No:	HA-078	Fountain Led Light (Nozzle Mount)		Round dia 100mm Material SS 304 Angle 30 IP-68		Volts/Watts: 12V/18Wt		Light: Warm/Cool White/ Multi Color	
Model No:	HA-077																						
Fountain Led Light (Nozzle Mount)																							
Round Dia 150mm Angle 30-45 Material SS 304 IP-68																							
Volts/Watts: 12V/3wt																							
Light: Warm/Cool White/ Multi Color																							
Model No:	HA-078																						
Fountain Led Light (Nozzle Mount)																							
Round dia 100mm Material SS 304 Angle 30 IP-68																							
Volts/Watts: 12V/18Wt																							
Light: Warm/Cool White/ Multi Color																							
	<table border="1"> <tr><td>Model No:</td><td>HA-079</td></tr> <tr><td colspan="2">ABS Mini Led Under Water Light</td></tr> <tr><td colspan="2">Round Dia 90mm Niche Dia-60mm/Depth-63mm Material-ABS 18 Multi Color Leds, IP-68</td></tr> <tr><td colspan="2">Volts/Watts: 12V / 3W</td></tr> <tr><td colspan="2">Light: Warm/Cool White/ Multi Color</td></tr> </table>	Model No:	HA-079	ABS Mini Led Under Water Light		Round Dia 90mm Niche Dia-60mm/Depth-63mm Material-ABS 18 Multi Color Leds, IP-68		Volts/Watts: 12V / 3W		Light: Warm/Cool White/ Multi Color			<table border="1"> <tr><td>Model No:</td><td>HA-080</td></tr> <tr><td colspan="2">Fountain Under Water Light (Stand)</td></tr> <tr><td colspan="2">Diameter-110mm Material-SS 304 IP-68</td></tr> <tr><td colspan="2">Volts/Watts: 12V/9W/18W</td></tr> <tr><td colspan="2">Light: Warm/Cool White/ Multi Color</td></tr> </table>	Model No:	HA-080	Fountain Under Water Light (Stand)		Diameter-110mm Material-SS 304 IP-68		Volts/Watts: 12V/9W/18W		Light: Warm/Cool White/ Multi Color	
Model No:	HA-079																						
ABS Mini Led Under Water Light																							
Round Dia 90mm Niche Dia-60mm/Depth-63mm Material-ABS 18 Multi Color Leds, IP-68																							
Volts/Watts: 12V / 3W																							
Light: Warm/Cool White/ Multi Color																							
Model No:	HA-080																						
Fountain Under Water Light (Stand)																							
Diameter-110mm Material-SS 304 IP-68																							
Volts/Watts: 12V/9W/18W																							
Light: Warm/Cool White/ Multi Color																							
	<table border="1"> <tr><td>Model No:</td><td>HA-081</td></tr> <tr><td colspan="2">Junction Box For Underwater Light</td></tr> <tr><td colspan="2">Available in 240V-12V Standard plug Front-129mmx129mm Depth-86mm, Niche Dia-11mm</td></tr> <tr><td colspan="2">Material ABS</td></tr> <tr><td colspan="2">Option for Flexible Conduit Hose</td></tr> </table>	Model No:	HA-081	Junction Box For Underwater Light		Available in 240V-12V Standard plug Front-129mmx129mm Depth-86mm, Niche Dia-11mm		Material ABS		Option for Flexible Conduit Hose			<table border="1"> <tr><td>Model No:</td><td>HA-082</td></tr> <tr><td colspan="2">Led Under Water Light</td></tr> <tr><td colspan="2">Diameter 100 mm Material SS 304 IP-68 Surface Mount</td></tr> <tr><td colspan="2">Volts/Watts: 12V/9Wt, 10wt</td></tr> <tr><td colspan="2">Led Color: Warm / Cool White</td></tr> </table>	Model No:	HA-082	Led Under Water Light		Diameter 100 mm Material SS 304 IP-68 Surface Mount		Volts/Watts: 12V/9Wt, 10wt		Led Color: Warm / Cool White	
Model No:	HA-081																						
Junction Box For Underwater Light																							
Available in 240V-12V Standard plug Front-129mmx129mm Depth-86mm, Niche Dia-11mm																							
Material ABS																							
Option for Flexible Conduit Hose																							
Model No:	HA-082																						
Led Under Water Light																							
Diameter 100 mm Material SS 304 IP-68 Surface Mount																							
Volts/Watts: 12V/9Wt, 10wt																							
Led Color: Warm / Cool White																							
	<table border="1"> <tr><td>Model No:</td><td>HA-083</td></tr> <tr><td colspan="2">Led Driver for RGB Under Water Lights</td></tr> <tr><td colspan="2">Led Controller for RGB Multicolor Light Input Voltage-AC 220V Output Voltage-DC 12V</td></tr> <tr><td colspan="2">Body-MS Powder Coated</td></tr> </table>	Model No:	HA-083	Led Driver for RGB Under Water Lights		Led Controller for RGB Multicolor Light Input Voltage-AC 220V Output Voltage-DC 12V		Body-MS Powder Coated			<table border="1"> <tr><td>Model No:</td><td>HA-084</td></tr> <tr><td colspan="2">LED Controller</td></tr> <tr><td colspan="2">Power Supply available in 2A, 5A, 10A, 12.5A, 15A, 20A</td></tr> <tr><td colspan="2">Volts: 12V-DC</td></tr> </table>	Model No:	HA-084	LED Controller		Power Supply available in 2A, 5A, 10A, 12.5A, 15A, 20A		Volts: 12V-DC					
Model No:	HA-083																						
Led Driver for RGB Under Water Lights																							
Led Controller for RGB Multicolor Light Input Voltage-AC 220V Output Voltage-DC 12V																							
Body-MS Powder Coated																							
Model No:	HA-084																						
LED Controller																							
Power Supply available in 2A, 5A, 10A, 12.5A, 15A, 20A																							
Volts: 12V-DC																							

UNDERWATER LIGHTS/ LIGHTING

Underwater Lights - Swimming Pool | Fountain

	<table border="1"> <tr><td>Model No:</td><td>HUWL-10</td></tr> <tr><td colspan="2">LED Under Water Light</td></tr> <tr><td colspan="2">Beam Angle 120 deg, CCT(k)-6500, Material-ABS, Diameter-285mm, Thickness-85mm, Deliver 34 lm@65mA, 4000k</td></tr> <tr><td colspan="2">Volts/Walts: 12V/10W</td></tr> <tr><td colspan="2">Light: Warm/Cool White/ Blue Color</td></tr> </table>	Model No:	HUWL-10	LED Under Water Light		Beam Angle 120 deg, CCT(k)-6500, Material-ABS, Diameter-285mm, Thickness-85mm, Deliver 34 lm@65mA, 4000k		Volts/Walts: 12V/10W		Light: Warm/Cool White/ Blue Color			<table border="1"> <tr><td>Model No:</td><td>HUWL-20</td></tr> <tr><td colspan="2">LED Under Water Light</td></tr> <tr><td colspan="2">Beam Angle 120 deg, CCT(k)-6500, Material-ABS, Diameter-285mm, Thickness-85mm, Deliver 34 lm@65mA, 4000k</td></tr> <tr><td colspan="2">Volts/Walts: 12V/20W</td></tr> <tr><td colspan="2">Light: Warm/Cool White/ Blue Color</td></tr> </table>	Model No:	HUWL-20	LED Under Water Light		Beam Angle 120 deg, CCT(k)-6500, Material-ABS, Diameter-285mm, Thickness-85mm, Deliver 34 lm@65mA, 4000k		Volts/Walts: 12V/20W		Light: Warm/Cool White/ Blue Color	
Model No:	HUWL-10																						
LED Under Water Light																							
Beam Angle 120 deg, CCT(k)-6500, Material-ABS, Diameter-285mm, Thickness-85mm, Deliver 34 lm@65mA, 4000k																							
Volts/Walts: 12V/10W																							
Light: Warm/Cool White/ Blue Color																							
Model No:	HUWL-20																						
LED Under Water Light																							
Beam Angle 120 deg, CCT(k)-6500, Material-ABS, Diameter-285mm, Thickness-85mm, Deliver 34 lm@65mA, 4000k																							
Volts/Walts: 12V/20W																							
Light: Warm/Cool White/ Blue Color																							
	<table border="1"> <tr><td>Model No:</td><td>HA-068(RGB)</td></tr> <tr><td colspan="2">LED Under Water Light</td></tr> <tr><td colspan="2">Material ABS, IP-68 Round Dia-167mm Angle 30-45 deg. IP-68</td></tr> <tr><td colspan="2">Volts/Walts: 12V/18W</td></tr> <tr><td colspan="2">Light:RGB/Multi Color</td></tr> </table>	Model No:	HA-068(RGB)	LED Under Water Light		Material ABS, IP-68 Round Dia-167mm Angle 30-45 deg. IP-68		Volts/Walts: 12V/18W		Light:RGB/Multi Color			<table border="1"> <tr><td>Model No:</td><td>HUWL - 12</td></tr> <tr><td colspan="2">LED Under Water Light</td></tr> <tr><td colspan="2">Material ABS Diameter - 178mm Thickness -30mm Surface Mount, IP-68</td></tr> <tr><td colspan="2">Volts/Walts: 12V/12W</td></tr> <tr><td colspan="2">Light: Warm/Cool White</td></tr> </table>	Model No:	HUWL - 12	LED Under Water Light		Material ABS Diameter - 178mm Thickness -30mm Surface Mount, IP-68		Volts/Walts: 12V/12W		Light: Warm/Cool White	
Model No:	HA-068(RGB)																						
LED Under Water Light																							
Material ABS, IP-68 Round Dia-167mm Angle 30-45 deg. IP-68																							
Volts/Walts: 12V/18W																							
Light:RGB/Multi Color																							
Model No:	HUWL - 12																						
LED Under Water Light																							
Material ABS Diameter - 178mm Thickness -30mm Surface Mount, IP-68																							
Volts/Walts: 12V/12W																							
Light: Warm/Cool White																							
	<table border="1"> <tr><td>Model No:</td><td>HSL-01</td></tr> <tr><td colspan="2">Fountain Led Under Water Light</td></tr> <tr><td colspan="2">Depth:55mm, Material: ABS Outer Diameter: 230mm Back Housing OD: 129mm Front Glass OD: 133mm</td></tr> <tr><td colspan="2">Volts/Walts: 12V/12W/24W</td></tr> <tr><td colspan="2">Led Color: Warm & Cool White / Multi Color/RGB</td></tr> </table>	Model No:	HSL-01	Fountain Led Under Water Light		Depth:55mm, Material: ABS Outer Diameter: 230mm Back Housing OD: 129mm Front Glass OD: 133mm		Volts/Walts: 12V/12W/24W		Led Color: Warm & Cool White / Multi Color/RGB			<table border="1"> <tr><td>Model No:</td><td>HSL-02</td></tr> <tr><td colspan="2">Fountain Led Under Water Light</td></tr> <tr><td colspan="2">Depth:33mm,Material: ABS Outer Diameter: 165mm Back Housing OD: 109mm Front Glass OD: 112mm</td></tr> <tr><td colspan="2">Volts/Walts: 12V/12W</td></tr> <tr><td colspan="2">Led Color: Warm & Cool White / Multi Color/RGB</td></tr> </table>	Model No:	HSL-02	Fountain Led Under Water Light		Depth:33mm,Material: ABS Outer Diameter: 165mm Back Housing OD: 109mm Front Glass OD: 112mm		Volts/Walts: 12V/12W		Led Color: Warm & Cool White / Multi Color/RGB	
Model No:	HSL-01																						
Fountain Led Under Water Light																							
Depth:55mm, Material: ABS Outer Diameter: 230mm Back Housing OD: 129mm Front Glass OD: 133mm																							
Volts/Walts: 12V/12W/24W																							
Led Color: Warm & Cool White / Multi Color/RGB																							
Model No:	HSL-02																						
Fountain Led Under Water Light																							
Depth:33mm,Material: ABS Outer Diameter: 165mm Back Housing OD: 109mm Front Glass OD: 112mm																							
Volts/Walts: 12V/12W																							
Led Color: Warm & Cool White / Multi Color/RGB																							
	<table border="1"> <tr><td>Model No:</td><td>HFL - 01</td></tr> <tr><td colspan="2">Fountain Led Under Water Light</td></tr> <tr><td colspan="2">Front-SS 304, Back Housing Aluminium, Dia Front-94mm, Dia Back-60mm, Power LED, Thickness-66mm Power LED, Stand Type</td></tr> <tr><td colspan="2">Volts/Walts: 12V/9W</td></tr> <tr><td colspan="2">Light:Warm/Cool White/ Multi Color</td></tr> </table>	Model No:	HFL - 01	Fountain Led Under Water Light		Front-SS 304, Back Housing Aluminium, Dia Front-94mm, Dia Back-60mm, Power LED, Thickness-66mm Power LED, Stand Type		Volts/Walts: 12V/9W		Light:Warm/Cool White/ Multi Color			<table border="1"> <tr><td>Model No:</td><td>HFL - 02</td></tr> <tr><td colspan="2">Fountain Led Under Water Light</td></tr> <tr><td colspan="2">Front-SS 304, Back Housing Aluminium, Dia Front-90mm, Dia Back-60mm, Power LED, Thickness-66mm Power LED, Stand Type</td></tr> <tr><td colspan="2">Volts/Walts: 12V/9W</td></tr> <tr><td colspan="2">Light: Warm White/ RGB Multicolor</td></tr> </table>	Model No:	HFL - 02	Fountain Led Under Water Light		Front-SS 304, Back Housing Aluminium, Dia Front-90mm, Dia Back-60mm, Power LED, Thickness-66mm Power LED, Stand Type		Volts/Walts: 12V/9W		Light: Warm White/ RGB Multicolor	
Model No:	HFL - 01																						
Fountain Led Under Water Light																							
Front-SS 304, Back Housing Aluminium, Dia Front-94mm, Dia Back-60mm, Power LED, Thickness-66mm Power LED, Stand Type																							
Volts/Walts: 12V/9W																							
Light:Warm/Cool White/ Multi Color																							
Model No:	HFL - 02																						
Fountain Led Under Water Light																							
Front-SS 304, Back Housing Aluminium, Dia Front-90mm, Dia Back-60mm, Power LED, Thickness-66mm Power LED, Stand Type																							
Volts/Walts: 12V/9W																							
Light: Warm White/ RGB Multicolor																							
	<table border="1"> <tr><td>Model No:</td><td>HFL - 03</td></tr> <tr><td colspan="2">Fountain Led Under Water Light</td></tr> <tr><td colspan="2">Front-SS 304, Back Housing Aluminium, Dia Front-150mm, Thickness-28mm Center Hole Id-35mm Back Niche Size-113mm</td></tr> <tr><td colspan="2">Volts/Walts: 12V/18W</td></tr> <tr><td colspan="2">Light: Warm White/RGB</td></tr> </table>	Model No:	HFL - 03	Fountain Led Under Water Light		Front-SS 304, Back Housing Aluminium, Dia Front-150mm, Thickness-28mm Center Hole Id-35mm Back Niche Size-113mm		Volts/Walts: 12V/18W		Light: Warm White/RGB			<table border="1"> <tr><td>Model No:</td><td>HFL-05</td></tr> <tr><td colspan="2">Fountain Led Under Water Light</td></tr> <tr><td colspan="2">Front SS 304, Back Housing Aluminium Power Led, Stand Type Dia Front:150mm Dia Back: 115mm, Thickness:30mm</td></tr> <tr><td colspan="2">Volts/Walts: 12V / 18W</td></tr> <tr><td colspan="2">Light: Warm White/ Multi Color</td></tr> </table>	Model No:	HFL-05	Fountain Led Under Water Light		Front SS 304, Back Housing Aluminium Power Led, Stand Type Dia Front:150mm Dia Back: 115mm, Thickness:30mm		Volts/Walts: 12V / 18W		Light: Warm White/ Multi Color	
Model No:	HFL - 03																						
Fountain Led Under Water Light																							
Front-SS 304, Back Housing Aluminium, Dia Front-150mm, Thickness-28mm Center Hole Id-35mm Back Niche Size-113mm																							
Volts/Walts: 12V/18W																							
Light: Warm White/RGB																							
Model No:	HFL-05																						
Fountain Led Under Water Light																							
Front SS 304, Back Housing Aluminium Power Led, Stand Type Dia Front:150mm Dia Back: 115mm, Thickness:30mm																							
Volts/Walts: 12V / 18W																							
Light: Warm White/ Multi Color																							
	<table border="1"> <tr><td>Model No:</td><td>HFL-07</td></tr> <tr><td colspan="2">Fountain Led Under Water Light</td></tr> <tr><td colspan="2">Material: ABS, Dia Front:180mm Dia Back:68mm, Thickness:22mm</td></tr> <tr><td colspan="2">Volts/Walts: 12V/27W</td></tr> <tr><td colspan="2">Led Color: Warm White / RGB</td></tr> </table>	Model No:	HFL-07	Fountain Led Under Water Light		Material: ABS, Dia Front:180mm Dia Back:68mm, Thickness:22mm		Volts/Walts: 12V/27W		Led Color: Warm White / RGB			<table border="1"> <tr><td>Model No:</td><td>HFL-08</td></tr> <tr><td colspan="2">Fountain Led Under Water Light</td></tr> <tr><td colspan="2">Front-SS 304, Back Housing Aluminium, Dia Front-110mm, Niche Dia-73mm, Power LED, Thickness-27mm</td></tr> <tr><td colspan="2">Volts/Walts: 12V/9W</td></tr> <tr><td colspan="2">Light: Warm White / RGB Multi Color</td></tr> </table>	Model No:	HFL-08	Fountain Led Under Water Light		Front-SS 304, Back Housing Aluminium, Dia Front-110mm, Niche Dia-73mm, Power LED, Thickness-27mm		Volts/Walts: 12V/9W		Light: Warm White / RGB Multi Color	
Model No:	HFL-07																						
Fountain Led Under Water Light																							
Material: ABS, Dia Front:180mm Dia Back:68mm, Thickness:22mm																							
Volts/Walts: 12V/27W																							
Led Color: Warm White / RGB																							
Model No:	HFL-08																						
Fountain Led Under Water Light																							
Front-SS 304, Back Housing Aluminium, Dia Front-110mm, Niche Dia-73mm, Power LED, Thickness-27mm																							
Volts/Walts: 12V/9W																							
Light: Warm White / RGB Multi Color																							
	<table border="1"> <tr><td>Model No:</td><td>HFL-09</td></tr> <tr><td colspan="2">Fountain Led Under Water Light</td></tr> <tr><td colspan="2">Front-SS 304, Back Housing Aluminium, Dia Front-122mm, Power LED, Thickness-30mm Power LED, Stand Type</td></tr> <tr><td colspan="2">Volts/Walts: 12V/18W</td></tr> <tr><td colspan="2">Light: Warm White / RGB Multi Color</td></tr> </table>	Model No:	HFL-09	Fountain Led Under Water Light		Front-SS 304, Back Housing Aluminium, Dia Front-122mm, Power LED, Thickness-30mm Power LED, Stand Type		Volts/Walts: 12V/18W		Light: Warm White / RGB Multi Color			<table border="1"> <tr><td>Model No:</td><td>HFL-010</td></tr> <tr><td colspan="2">Fountain Led Under Water Light</td></tr> <tr><td colspan="2">Front SS 304, Back Housing Aluminium Power Led, Dia Front:124mm Niche Dia:89mm, Thickness:34mm</td></tr> <tr><td colspan="2">Volts/Walts: 12V/18W</td></tr> <tr><td colspan="2">Color: Warm White/RGB</td></tr> </table>	Model No:	HFL-010	Fountain Led Under Water Light		Front SS 304, Back Housing Aluminium Power Led, Dia Front:124mm Niche Dia:89mm, Thickness:34mm		Volts/Walts: 12V/18W		Color: Warm White/RGB	
Model No:	HFL-09																						
Fountain Led Under Water Light																							
Front-SS 304, Back Housing Aluminium, Dia Front-122mm, Power LED, Thickness-30mm Power LED, Stand Type																							
Volts/Walts: 12V/18W																							
Light: Warm White / RGB Multi Color																							
Model No:	HFL-010																						
Fountain Led Under Water Light																							
Front SS 304, Back Housing Aluminium Power Led, Dia Front:124mm Niche Dia:89mm, Thickness:34mm																							
Volts/Walts: 12V/18W																							
Color: Warm White/RGB																							


UNDERWATER Lights/ Lighting

Led Fountain Underwater Light



Model No - HFL-011
LED Fountain Underwater Light

Material SS 304, Dia Front : 105mm
Back Niche Dia : 77 mm
Thickness : 34mm
With Stand IP 68
Volts/Watts : 12V/9W
Colour : RGB/Multicolour

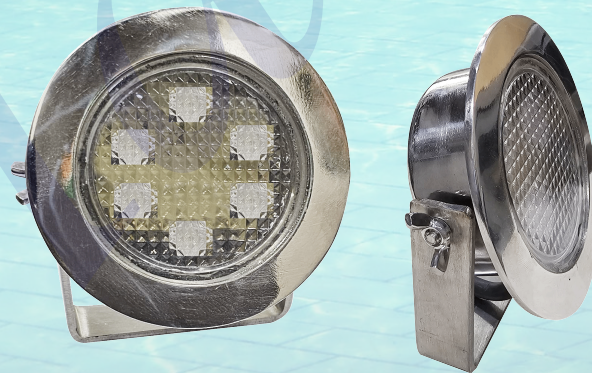

Model No - HFL-012
LED Fountain Underwater Light

Material SS 304, Dia Front : 118mm
Back Niche Dia : 89 mm
Thickness : 32mm
With Stand IP 68
Volts/Watts : 12V/18W
Colour : RGB/Multicolour



HALBERT COUNTER CURRENT SYSTEM

Counter Current System (ABS)



Single-stage centrifugal pumps with complete drainage device. Inbuilt counterflow system.

This jet streams are ready for easy installation. It is possible to regulate. The jet strength adjustable. The nozzle, suction and pneumatic switch are positioned in the front cover panel of the equipment. Complete counter-flow system includes:-

Counter flow nozzle 40mm (regulation water-air)

Front wall lead-through Pump

Electro pneumatic switch with safety element

PVC fitting

Available 3HP/2.2KW, 4HP/3KW, 5.5HP/4KW

MOTOR:

Asynchronous, two poles.

IP 55 protection.

Class F insulation.

Continuous operation.

MATERIAL:


Suction and discharge mounting in polypropylene.

Motor shaft in stainless steel AISI-304.

Impeller in PPO.

Mechanical seal in graphite and steatite.

Motor housing in aluminium L-2521.

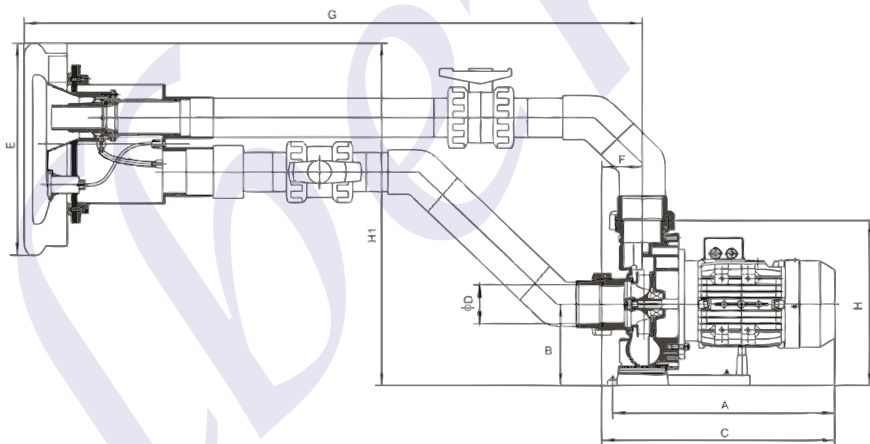


Technical Specification:

HP	KW	V		A		P1(KW)	Q	L/min M ³ /h	0	333.3	500	666.7	833.3	1000	1166.7	1333.3		
		1- 50HZ	3- 50HZ	1- 220	3- 380				0	20	30	40	50	60	70	80		
3	2.2	220	380	15	4.9	2.8	H(m)	12	11.7	10.5	9.8	7.9	5.8	2.1				
4	3		380		6.4	3.6		14.5	14.2	14	13.4	11.5	9.5	6.7				
5.5	4		380		8.3	4.7		17	16.2	16	15.3	13.8	12.5	9.5	7.5			

SS Counter Current System



- Jet Swim house made of stainless steel, front and handle made of polished acid-proof stainless steel AISI 304. For mounting in concrete, wood or building block walls.
- Pump power: 3KW
- Control box including contractor and overhead protection
- Air mixture control
- Air mixture hose
- Hose connectors
- Hose clamps
- Hose for suction and pressure
- PVC Valves

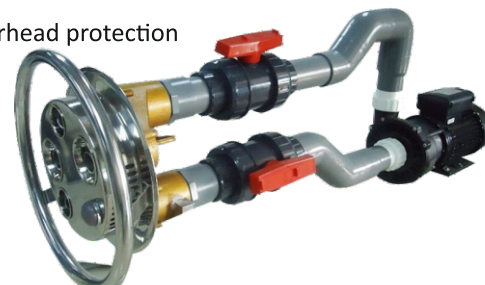

Technical Characteristics
















Model	Power (KW)	Voltage	Connection Size (mm)	Water Capacity (L/Min)	Jet Material
HSJET-3000	3	220/380	75	70	Bronze / Stainless Steel

SWIMMING POOL OVERFLOW GRATING

Swimming Pool Overflow Grating-Single | Double | Tripple Lock System

GRATING FEATURES:

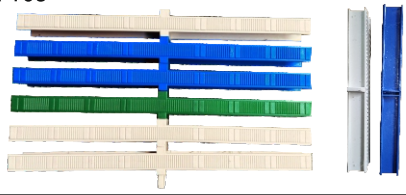1. Manufactured in Polypropylene + Co-Polymer with UV Protected
2. Different lock system(Single/Double/Triple) to match pool shape
3. Heavy Duty with Non Slip Surface.
4. Weather Proof
5. Colours Available- White, Blue, Black & All As per customers demand.
6. Height: 24mm, 35mm
7. Available Size Variant: 150mm, 200mm, 250mm, 300mm, 350mm, 400mm, 450mm, 500mm


HA-092 	HA-093 	HA-094 
Blue/Red (300mmX24mm)	Blue/Sky Blue/Black/White (300mmX24mm)	Sky Blue/White/Black (300mmX24mm)
HA-095 	HA-096 	HA-097 
Sky Blue/Yellow/Blue/White (300mmX24mm)	Black (300mmX24mm)	Blue (300mmX24mm)
HA-098 	HA-099 	HA-100 
Red/Grey/Blue/White (300mmX24mm)	Sky Blue/Yellow/Blue/White (250mmX24mm)	White (250mmX24mm)
HA-101 	HA-102 	HA-103 
White (300mmX24mm)	Yellow (300mmX24mm)	White (250mm/300mmX35mm)
HA-104 	HA-105 	HA-106 
Multicolor (300mm/350mm/400mmX24mm)	Red (300mm/350mm/400mmX24mm)	Grating Support Profile



SWIMMING POOL LADDER

Swimming Pool Ladders


HOF Series Ladders

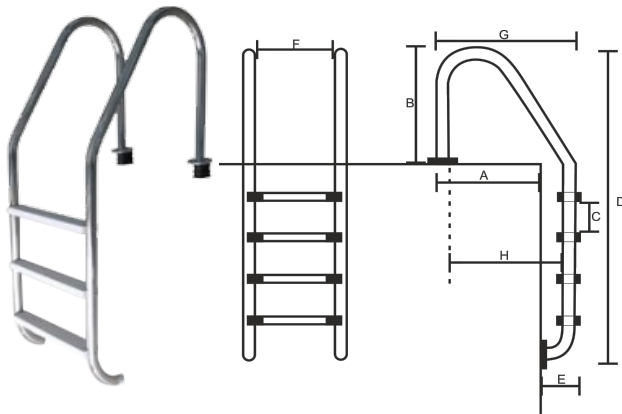

Halbert Pool Ladders are made from high quality grade SS 304, stainless steel 38/42mm tube for reliability and durability complete with anchoring fixtures.

CODE	Trades	A	B	C	D	E	F	G	H
HOF-215	2	510	700	250	1450	230	460	760	685
HOF-315	3	510	700	250	1700	230	460	760	685
HOF-415	4	510	700	250	1950	230	460	760	685
HOF-515	5	510	700	250	2200	230	460	760	685

HLT Series Ladders

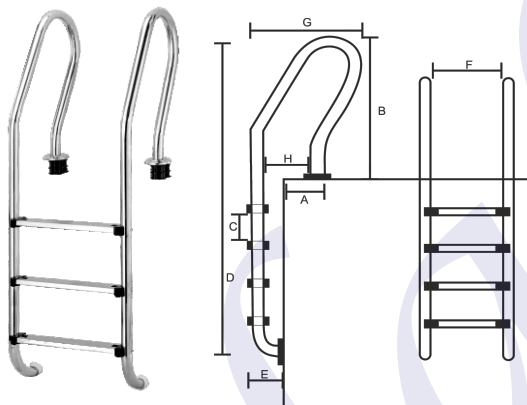

Halbert Pool Ladders are made from high quality grade SS 304, stainless steel 38/42mm tube for reliability and durability complete with anchoring fixtures.

CODE	Trades	A	B	C	D	E	F	G	H
HLT-215	2	180	710	250	1450	230	460	565	340
HLT-315	3	180	710	250	1700	230	460	565	340
HLT-415	4	180	710	250	1950	230	460	565	340
HLT-515	5	180	710	250	2200	230	460	565	340

Ladders Fitting and Accessories



HU Series Ladder




Ladder Steps



Anchor & Fittings

Pool Cover

Swimming Pool Cover



Pool Cover Benefits:-

- Besides offering energy savings, pool covers also do the following:
- Conserve water by reducing the amount of make-up water needed by 30%–50%
 - Reduce the pool's chemical consumption by 35%–60%
 - Reduce cleaning time by keeping dirt and other debris out of the pool.
 - You can significantly reduce swimming pool heating costs by using a pool cover

Specification:-


- Material LDPE
- Bubble diameter 8- 12 mm
- Thickness 400 – 600 micron
- Available in every shape and size
- UV and Chemical resistant
- Strong and heavy duty border
- Heat welded to any shape and size
- Durable and water proof
- Save Water chemical and valuable time
- Long life
- Easy Installation

Pool Cover Reel /Pool Cover Roller

Swimming Pool Cover Reel make it an easy operation if you install a Reel(Pool Cover Roller) for your pool cover

Technical Specifications

- Stainless steel stands and tube grade 304
- Well Polished
- Heavy duty tubing
- Bearings per side insure smooth operation
- Every sizes are available as per customer choice
- Superior control of pool Cover handling procedure

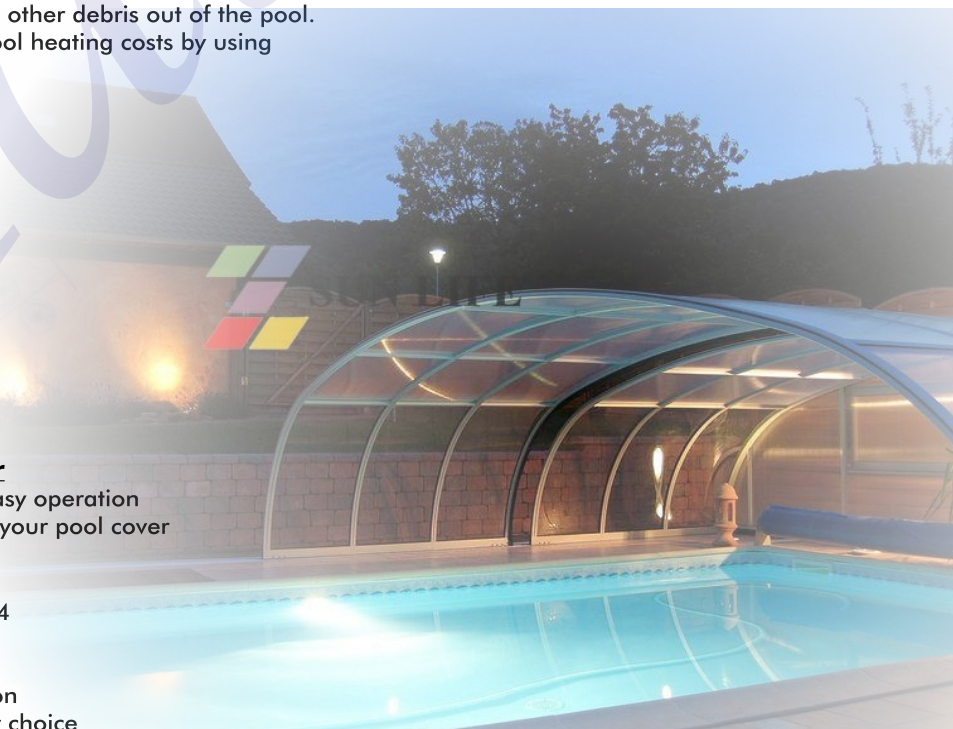



SPA AND BATH FITTING





SPA & BATH FITTINGS


Jacuzzi Bath Fitting


	Model No:	HA-108
	Jacuzzi Jet/Spa Jet	
	Color: White	
	Material : ABS	
Size:50mm X 50mm		


	Model No:	HA-108A
	Push Button (Chrome)	
	Color: White	
	Material : ABS	


	Model No:	HA-109
	Jacuzzi Jet/Spa Jet with SS face cover	
	Color: White	
	Material : ABS	
Size:50mm X 50mm		


	Model No:	HA-110
	Pneumatic Switch	
	Color: Black/White	
	Material : ABS	


	Model No:	HA-111
	Heavy Duty Vortex Air Blower	
	1HP/XB750, 1.5HP/XB1100 2HP/XB1500, 3HP/XB2200	
	Material: Aluminium	


	Model No:	HA-112
	Multi Hole Air Bubble Jet	
	Size: 20mm	
	Color: White	
Material: ABS		


	Model No:	HA-113
	Nine Hole Jet	
	Size: 27mm	
	Color: White	
Material: ABS		


	Model No:	HA-114
	SS Air Controller	
	Size: -	
	Color: White	
Material: ABS		


	Model No:	HA-115
	Air Controller	
	Size: ID-33mm, OD-42mm	
	Color: White/Chrome	
Material: ABS		

	Model No:	HA-116
	Push / Air Button	
	Size: 35mm	
	Color: White/Chrome	
Material: ABS		

	Model No:	HA-117
	Gutter Drain	
	Size: 1.5"/2"	
	Color: White	
Material: ABS		

	Model No:	HA-118
	Standard Air Controller (Threaded)	
	Size: 1.5"	
	Color: White	
Material: ABS		

	Model No:	HA-119
	Pneumatic Tube/Hose Pipe	
	Color: Transparent	
	Material: PU	


	Model No:	HA-120
	Air Blower	
	Power - 300w, 400w, 700w, 900w	
	Color: Black	
Material: ABS		

SAUNA & STEAM

Spa and Health

STEAM ROOM

World Class Health Treatment at any movement at your home/office. A steam room, unlike a sauna is a moist environment. Avoid using construction materials which are subject to corrosion. The temperature inside the steam room is an average of 115 - 125F. A steam room are made of water proof material all inside surface of the steam room is must be completely sealed and the ideal height of steam room is approx. 7 feet.

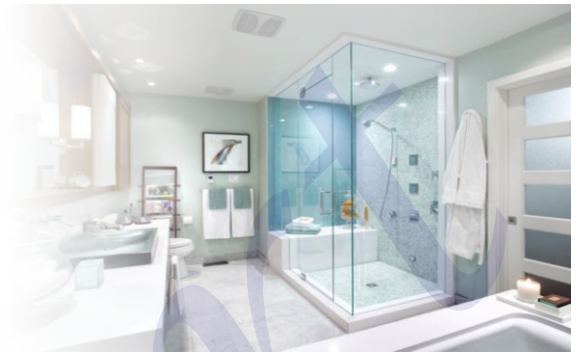

STEAM GENERATOR

Steam Generator Standard Features & Advantage:-
 Stainless steel reservoir.
 Heavy duty heating element.
 Electronic water-level control system.
 Safety valve for extra precaution.
 Built-in low voltage protector.

Varients Available

4 Kw	5 Kw	6 Kw	7.5 Kw	9 Kw	10 Kw	12 Kw	15 Kw	18 Kw	21 Kw	24 Kw
------	------	------	--------	------	-------	-------	-------	-------	-------	-------

SAUNA HEATER

Features and Advantages:-
 Stainless steel outer casing of the heater.
 Operating Switches are placed on the upper part on the side of the heater.
 Sauna heater is suitable for dry or wet saunas.
 Heavy duty electrical elements and long durability.
 Easy to install
 Fast warm - up due to vented body design.

BENEFITS:-

Relieves congestion.
 Relax the overworked muscles.
 Deeply cleans and moisturizes the skin.
 Detox your body.
 It makes you feel mentally/physically relaxed



SAUNA ROOM & ACCESSORIES

A sauna is a small size of room that can be heated at very high temperature, with well control humidity. The health benefit and therapeutic value saunas provide have been known for countries. Halbert offers orange of saunas to help relax and improve overall health as well as promote well being. Saunas are also used for recreational purpose. Standard residential sauna sizes are- 5'x7' & 6'x7'. Top bench should be 7' long.



Pool Heating SYSTEM

Domestic Heat Pump



- Patented high-performance titanium exchanger has more stable performance and greatly resist erosion of chlorine ion water, solid and durable.
- Exterior is anti-UV plastic ABS corrosion resistant casing material with injection model or normal plastic model.
- By using high-heat exchanger technology, 65-80% of running cost can be saved compared with other heating machines. It consumes 1kw to produce about 5.5kw heating capacity, possessing high COP.
- Heating and cooling with reversible defrosting.
- Remote and intelligent controller design with Celsius of fahrenheit temperature display for options.
- LCD or colorful LED controller for options
- Super power failure memory.
- Flow switch built-in to avoid the low level water or devoid of water.
- Advanced technology to mute noise from compressors and fans.

Code			HHPD4.5	HHPD9.5	HHPD12	HHPD17	HHPD22	HHPD26	HHPD35	
Measuring Conditions A 24°C W 26°C	Heating Capacity	KW	4.5	9.5	12	17	22	26	35	
	Input Power	KW	0.85	1.73	2.26	2.83	3.66	4.56	6.36	
	Running Content	A	3.86	7.85	10.72	12.88	5.83	7.6	9.39	
		COP	5.3	5.5	5.3	6	6	5.7	5.5	
Measuring Conditions A 15°C W 26°C	Heating Capacity	KW	3.6	7.6	10	13.6	16.8	21	26.5	
	Input Power	KW	0.82	1.65	2.27	2.83	3.36	4.57	5.76	
	Running Capacity	A	3.72	7.51	10.33	12.88	5.6	7.61	9.6	
		COP	4.4	4.6	4.4	4.8	5	4.6	4.6	
Measuring Conditions A 7°C W 26°C	Heating Capacity	KW	3	6.5	8.6	11.5	14.5	17	23.3	
	Input Power	KW	0.88	1.71	2.39	3.03	3.63	4.47	6.13	
	Running Capacity	A	4.01	7.78	10.86	13.76	6.04	7.46	10.22	
		COP	3.4	3.8	3.6	3.8	4	3.8	3.8	
Power Supply	V/PH/HZ	220-240V/1PH/50HZ					380-400V/3PH/50HZ110			
Max Height Input	KW	1.06	2.16	2.95	3.54	4.38	5.7	7.05		
Max Heating Current	A	4.82	9.81	13.4	16.1	7.29	9.5	11.74		
Max Cooling Input	KW	1.29	2.51	3.44	4.58	5.88	6.82	8.93		
Max Cooling Current	A	5.87	11.4	15.65	20.83	9.8	11.37	14.89		
Controller		LED/LCD								
Condenser		Titanium Coil								
Quality of Compressor		1	1	1	1	1	1	1		
Compressor		Rotary 1.55				Scroll 0.131.5				
Quality of Fan		1	1	1	1	1	2	2		
Input Power of Fan	W	71	122	122	122	230	230x2	230x2		
Fan Speed	RPM	850	830	830	830	830	850	859		
Noise	dB(A)(imtr)	50	54	55	56	56	57	58		
Water Connection	inch	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2		
Water Flow Rate	m³/h	3	6	7	10	12	15	18		
Water Pressure Drop	kpa	10	12	12	14	16	16	18		
Net Dimension	L	mm	778	1015	1015	1078	1078	1078	1078	
	W	mm	293	370	370	416	416	416	416	
	H	mm	511	621	621	708	958	1258	1258	
Packing Dimension	L	mm	875	1140	1140	1150	1150	1150	1150	
	W	mm	328	400	400	450	475	475	475	
	H	mm	545	676	676	838	1088	1388	1388	
Weight	Net Weight	kg	41	60	64	85	105	140	145	
	Gross Weight	kg	46	67	71	93	118	152	157	
Function	HT800-33"	Heating & Cooling with reversible defrosting								

Pool HEATING SYSTEM

Commercial Heat Pump



- Patented High-Performance Titanium Exchanger has more stable performance and greatly resist erosion of chlorine ion water, solid and durable.
- Exterior is anti-UV plastic ABS corrosion resistant casing material with injection model or normal plastic model.
- By using high-heat exchanger technology, 65-80% of running cost can be saved compared with other heating machines. It consumes 1kw to produce about 5.5kw heating capacity, possessing high COP.
- Heating and cooling with reversible defrosting.
- Remote and intelligent controller design with Celsius or fahrenheit temperature display for options.
- LCD or colorful LED controller for options
- Super power failure memory.
- Flow switch built-in to avoid the low level water or devoid of water.
- Advanced technology to mute noise from compressors and fans.

Code			HHPC45	HHPC50	HHPC60	HHPC70	HHPC90	HHPC105
Measuring Conditions A 24°C W 26°C	Heating Capacity	KW	45	50	60	70	90	105
	Input Power	KW	8.9	9.8	11.76	13.72	16.7	19.1
	Running Content	A	14.8	15.2	16.3	17.4	29.9	47.7
		COP		5.1	5.1	5.1	5.1	5.4
Measuring Conditions A 15°C W 26°C	Heating Capacity	KW	37.5	41.5	51.7	61.5	75.0	96.5
	Input Power	KW	9.2	9.7	11.7	12.8	17.2	25.3
	Running Capacity	A	15.3	16	17.3	18.6	30.8	48.4
		COP		4.3	4.3	4.3	4.3	4.5
Measuring Conditions A 7°C W 26°C	Heating Capacity	KW	31.3	34.3	42.2	50.1	62.5	93.8
	Input Power	KW	9.5	9.9	11.3	12.6	17.7	26.0
	Running Capacity	A	15.7	16.6	18.2	20.4	31.8	40.2
		COP		3.5	3.5	3.5	3.5	3.8
Max Height Input		KW	11.4	12.8	15.1	18.2	22.5	25.5
Max Heating Current		A	20.4	22.8	27.2	30.6	40.2	47.5
Power Supply		V/PH/HZ	380-400V/3PH/50HZ					
Controller			LED/LCD					
Condenser			Titanium Coil					
Quality of Compressor			2	2	2	2	3	4
Compressor			Scroll					
Noise		dB(A)(imtr)	60	60	60	60	62	63
Water Connection		inch	2	2	2	2	2½	3
Water Flow Rate		m³/h	24	24	24	24	52	50
Net Dimension	L	mm	1448	1448	1448	1448	2150	2000
	W	mm	730	730	730	730	760	1100
	H	mm	1060	1060	1060	1060	1330	1820
Packing Dimension	L	mm	1630	1630	1630	1630	2275	2150
	W	mm	810	810	810	810	900	1020
	H	mm	1180	1180	1180	1180	1500	2080
Weight	Net Weight	kg	260	260	260	260	510	600
	Gross Weight	kg	290	290	290	290	570	650
Function		HT800-33"	Heating & Cooling with reversible defrosting					

Pool HEATING SYSTEM

Pool | SPA Heater

The Halbert Spa Heaters are intended to use for small pools, jacuzzi and spa system. It will maintain the water at any relaxing and an enjoyable temperature.

Features:-

1. Digital Control Panel
2. Powder Coated
3. Stainless Steel
4. MS Cabinet.
5. Ip36 Water Proofing
6. Single/ Three Phase
7. User Friendly
8. Easy Installation.
9. Easy Servicing
10. Suitable for small pools jacuzzi and spas.
11. Shut down automatically
12. Can be set at desired temperature.



FAST AND EFFICIENT HEATING IN A NEW SMART DESIGN, MODERN MATERIALS AND BUILT FOR THE FUTURE.

KW	Phase	Input Voltage	Dimensions (mm)
4 KW	1 Phase, 3 Phase	230 V	440mmx460mmx185mm
5 KW	1 Phase, 3 Phase	230 V	440mmx460mmx185mm
6 KW	1 Phase, 3 Phase	230 V	440mmx460mmx185mm
7.5 KW	1 Phase, 3 Phase	230 V	440mmx460mmx185mm
9 KW	1 Phase, 3 Phase	230 V	440mmx460mmx185mm
10 KW	1 Phase, 3 Phase	230 V	490mmx460mmx185mm
12 KW	1 Phase, 3 Phase	230 V	490mmx460mmx185mm
15 KW	3 Phase	380-415 V	490mmx460mmx185mm
18 KW	3 Phase	380-415 V	510mmx460mmx185mm
21 KW	3 Phase	380-415 V	595mmx510mmx260mm
24 KW	3 Phase	380-415 V	595mmx510mmx260mm
27 KW	3 Phase	380-415 V	595mmx510mmx260mm
36 KW	3 Phase	380-415 V	595mmx510mmx260mm
45 KW	3 Phase	380-415 V	595mmx510mmx260mm
54 KW	3 Phase	380-415 V	595mmx510mmx260mm

WATER TREATMENT

Water Treatment - Chemical



TCCA - 90
Trichloroisocyanuric Acid
TCCA - 90 is available in Granular, Tablets, Powder form. Packing -25kgs, 50kgs. Effective Chlorine 90%. Moisture 0.5% Max. Long duration of Sterilizing effect.

HA-136



Aqua Shiner
Shining Effect : 100%
Removing Germs : 90%
Environment : ECO Friendly
Stopping the growth of fungus and bacteria
Packing : 5 Ltrs

HA-AS-100

Extra Power Pool Cleaner | PH Meter



HA-138

Algaecide

Algaecide is biocide used for killing and preventing the growth of algae, bacteria, germs, black / green algae. Can be used as a spray or directly into the water column.

Promotes Water Clarity



HA-139

PH Meter

Water Testing Equipment



HA-140

Hardness Test Kit



HA-053

Basic PH & CI Test Kit



HA-141

Thermometer

WATER TREATMENT

Ozone Generator



Ozone Generator is mainly used in medicine, water, pure water, mineral water, secondary water supply, swimming pool, aquaculture water, food and beverage industries such as water disinfection essence processing, and chemical industry, papermaking industry such as degreasing, bleaching, bleaching for life, industry, hospital sewage treatment (sterilization, remove BOD, COD, etc.), as well as the life sewage, industrial cooling water reuse treatment, etc.

Available Variants: 1GPH, 2GPH, 4GPH, 5GPH, 6GPH, 8GPH, 10GPH, 12GPH, 15 GPH, 20GPH, 30GPH, 40GPH, 50GPH, 60GPH, 70GPH, 80GPH, 100 GPH

BENEFITS :

- Which do not cause skin irritation and red eye.
- 100 % chemical free pool
- No eye and skin irritation
- Crystal clear water
- Effective in broad spectrum disinfections

Voltage	380V
Frequency	50 Hz
Power Source	Electric
Automation Grade	Automatic
Brand	Halbert
Material	SS

Floating Dispenser

FEATURES:

Floating Chemical Dispenser
Twist lock cap and adjustable ring

Uses:
for chlorination in tablet form.



Halbert-Inline Chemical Dispenser/Chlorine Feeder

FEATURES:-

- No Special venting required
- Completely enclosed-no escaping gases.
- Positive external no-clog control valve.
- Feeder is designed to automatically lower the water level so tablets are not soaking during off period of pump. This allows more efficient use of tablets.
- Size Available: 4.5LB- 2kgs / 9LB - 4kgs.



Halbert Electronic Dosing Pump



SALIENT FEATURES:-

- Liquid Head & Housing
- An all plastic housing is resistant to corrosive chemical agents.
- Head & Valves etc. all are made of chemical resistant.

Solenoid:-

- High quality, not rated solenoid is designed to dissipate capacities & pressure do not derate even or over extended use.

Specification:-

- Dosing Flow Rate: 0-4/0-6/0-8/0-10/0-15/0-20 LPH & 40LPH OPEN TALK
- Dosing Pressure: 10/8/4/3/3 kg/cm sq.
- Strokes/Minutes: Max135 Min:15

WATER TREATMENT

Halbert UV Sterilizer

Key Advantages:

1. High Output Amalgam Lamp for higher UV Dosage.
2. Smaller Footprints, Lower Operation cost.
3. Easy to install in new or existing water plants
4. Very Effective in complex Tertiary treated Water
5. UV tubes Housed in Synthetic Quartz Jacket
6. User friendly Green Technology
7. Microprocessor controlled Operator interface
8. BMS or Data logging interface
9. With Highly accurate UV Sensor
10. SS-316 Reactor Housings



Technical Specifications	Halbert-UV 16W	Halbert-UV 40W	Halbert-UV 80W	Halbert-UV 160W	Halbert-UV 240W	Halbert-UV 320W
Item Code	612056	612057	612058	612059	612060	612061
Max Pool Capacity	15000	40000	75000	150000	225000	300000
Max Flow	7200	20000	25000	30000	40000	50000
Max Pressure	2 bar	2 bar	2 bar	2 bar	2 bar	2 bar
Diameter Unit Φ	75	75	75	115	115	115
Length Unit (in MM)	450	975	975	975	970	970
Diameter In-Outlet Φ	63-50mm	63-50mm	63-50mm	63-50mm	63-50mm	63-50mm
Material of Construction	SS-316	SS-316	SS-316	SS-316	SS-316	SS-316
Ballast Type	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Supply Voltage	220 V AC, 50 Htz	220 V AC, 50 Htz	220 V AC, 50 Htz	220 V AC, 50 Htz	220 V AC, 50 Htz	220 V AC, 50 Htz
Maximum Current	0.29 Amp	0.29 Amp	0.57 Amp	1.1 Amp	1.6	2.1
Lamp Wattage	16 W	40 W	80 W	160 W	240 W	320 W
Wave Length	253.7	253.7	253.7	253.7	253.7	253.7
Lamp Voltage	43	94	97	103	109	115
Lamp Current	0.4	0.43	0.80	2.1	3.4	4.7
UV-C 100h Output(W)	3.9	15	25	50	75	100
μ W/cm ² at 1 Meter	39	144	230	468	706	944
Lamp Type	UV-C 16 W	UV-C 40 W	UV-C 80 W	UV-C 160 W X 2	UV-C 240 W X 2	UV-C 320 W X 2
Chemical Reduce	80%	80%	80%	80%	80%	80%
Weight (in KG)	3.5	4.5	4.5	7.5	10.5	14

Competition Pool Equipment

Halbert - Anti Wave Racing Lanes and Adjustable Starting Blocks



Anti Waves Racing Lanes:

Our latest model racing lanes represent the cutting edge of lane design and efficient wave dissipation. Anti wave racing lanes comply with all FINA, LEN and relevant regulations. These lanes are used to delineate the swimming lanes in pools. For competition and training for competition. Lane diameter is 110mm and 150mm available in different color options - Red, Blue, Yellow, Green and White. Prepared with CP+PP raw material. Lane Cable is SS316, 304 with diameter of 3.1mm to 6mm.

Starting Block:

Halbert Pool competition starting block are specifically designed for sporting competitions. The minimalist design and premium materials give it a contemporary appearance. It is made from stainless steel type AISI 304 Polished exterior appearance and has six places for adjusting the footrest.

Product specification:

Materials: AISI 304 Stainless Steel
 Polished exterior appearance
 Length: 791 mm, Equipped with 6 adjusting footrest
 Stepping out is easier with track start, High quality material.

Competition Equipment

HA-153 	HA-154 		HA-155
Racing Lane Anti-wave(110mm)	Racing Lane Ball and Anti-wave Combination (150mm)		Diving Board
HA-156 	HA-157 	HA-158 	HA-159
Line Anchor with Rod	Line Anchor Retractable Hook	Lane Tightner Hook	Snap Hook
HA-160 	HA-161 	HA-162 	HA-163
Pace Clock	Diving Board with Single Step	Safety Float Kit	Lifeguard Chair/ Coach Chair
HA-164 	HA-165 	HA-166 	HA-167
400mm Starting Bloc	700mm Starting Bloc	Storage Reel for Racing Lane	Back Stroke Indicator

Life Saving & Inflatables

Life Saving & Inflatable Equipment

HA-168 	HA-169 	HA-170 	HA-171 
Intex Round Pool	Intex Rectangular Pool	Sports Kick Board/Pad	Economat/Floating Bed
HA-172 	HA-173 	HA-174 	HA-175 
Fashion Mat(Assorted Colors)	Swimming Ring Tyre Shape	Swimming Ring	Nutty Donut Tube
HA-176 	HA-177 	HA-178 	HA-179 
Swim Ring Tube	Rainbow Sprinkle Donut Tube	Popular Printing Floating Ring	Life Buoy
HA-180 	HA-181 	HA-182 	HA-183 
Life Buoy (Kids)	Arm Bend	Arm Bend (Deluxe/Printed)	Swim Goggles
HA-184 	HA-185 	HA-186 	HA-187 
Swimming Cap	Pool Buoy	Beach Ball	Foot Bath

Life Saving & Fittings

Life Saving Equipment

<p>HA-1</p> 		<p>HA-190</p> 	<p>HA-191</p> 
<p>Oxygen Cylinder</p>	<p>Artificial Respirator/ Ambu Bag</p>	<p>Folding Stretcher</p>	<p>Rescue Hook/ Shepherd Hook</p>
<p>HA-192</p> 	<p>HA-193</p> 	<p>HA-194</p> 	<p>HA-195</p> 
<p>First Aid Box</p>	<p>Life Saving Jacket</p>	<p>Life Saving Jacket</p>	<p>Life Saving Jacket</p>

VALVES AND FITTINGS

<p>HA-196</p> 	<p>HA-197</p> 	<p>HA-198</p> 	<p>HA-199</p> 
<p>PVC Foot Valve</p>	<p>PVC Ball Valve</p>	<p>PVC Ball Valve</p>	<p>PVC Foot Valve</p>
<p>HA-200</p> 	<p>HA-201</p> 	<p>HA-202</p> 	<p>HA-203</p> 
<p>PVC Ball Valve</p>	<p>PVC Check Valve</p>	<p>Butterfly Valve</p>	<p>Nipple</p>
<p>HA-204</p> 	<p>HA-205</p> 	<p>HA-206</p> 	<p>HA-207</p> 
<p>PVC Coupling</p>	<p>PVC Union</p>	<p>PVC Reducer</p>	<p>Hose Cuff</p>



FOUNTAIN AND WATER FEATURES

FOUNTAIN NOZZLES

Fountain Nozzles




Model No:	HA-246
Bell Jet Nozzle	
Size: 1-1/2", 1", 3/4", 1/2"	
Application - Fountain	
Material: Brass SS Chrome Finish Excellent Performance	



Model No:	HA-254
Geysier Jet Nozzle	
Size: 1", 1-1/2", 3/4"	
Application - Fountain	
Material: Brass SS Chrome Finish Water level dependent, low height	



Model No:	HA-258
Ball Joint	
Size: 1", 1/2", 3/4", 1-1/2"	
Application - Nozzle Connector	
Material: Brass SS Chrome Finish Adjustable for different direction	




Model No:	HA-266
Crown Jet Nozzle	
Size: 1/2", 1/8", 1/4", 3/8"	
Application - Ring Fountain, Angular Jets	
Material: Brass SS Chrome Finish Adjustable Direction Alignment	




Model No:	HA-270
Cluster Jet Nozzle	
Connection size: 1", 1-1/2", 2"	
Application - Fountain	
Material: Brass Finish : Chrome/Golden	



Model No:	HA-278
Foam Jet Nozzle	
Size: 2", 1", 1/2", 1-1/2", 3/4"	
Application - Fountain	
Material: Brass Water level Dependent Foam Effect Installation level - above the water surface	

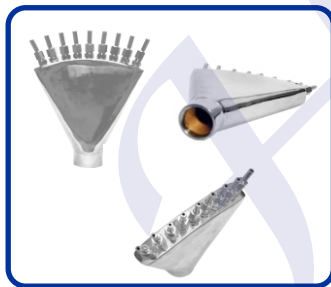

Model No:	HA-285
Finger Jet Nozzle	
Size: 1"	
Application - Fountain	
Material: Brass With multi-jet nozzle high pressure rotating and adjustable jets	



Model No:	HA-254
Rotational / Revolving Jet Nozzle	
Connection Size: 1", 1-1/2", 2"	
Application - Rotating Fountain	
Material: Brass SS Chrome Finish Water spray height 8ft-10ft available in 4 arms 6 arms	











Model No:	HA-290
Laminar Jet Nozzle	
Connection Size: 1-1/2"	
Application - Fountain	
Material: Stainless Steel Nozzle type - Straightaway short Water Shape - Curve LED Light - Multi-color 18W/27W	



Model No:	HA-294
Three Stage Jet Nozzle	
Connection Size: 1"	
Application - Fountain	
Material: Brass SS Chrome Finish Nozzle Diameter - 1/4mm adjustable direction Working Pressure - 6-10 psi	

WATER FEATURES

Water Features

	<table border="1"> <tr> <td>Model No:</td> <td>HA-298</td> </tr> <tr> <td colspan="2">Cascade Fall</td> </tr> <tr> <td colspan="2">Material: SS-316/304</td> </tr> <tr> <td colspan="2">Opening Width (mm)</td> </tr> <tr> <td colspan="2">W: 300/450/600/900</td> </tr> </table>	Model No:	HA-298	Cascade Fall		Material: SS-316/304		Opening Width (mm)		W: 300/450/600/900			<table border="1"> <tr> <td>Model No:</td> <td>HA-299</td> </tr> <tr> <td colspan="2">Cascade Fall</td> </tr> <tr> <td colspan="2">Material: SS-316/304</td> </tr> <tr> <td colspan="2">Opening Width (mm)</td> </tr> <tr> <td colspan="2">W: 300/450/600/900</td> </tr> </table>	Model No:	HA-299	Cascade Fall		Material: SS-316/304		Opening Width (mm)		W: 300/450/600/900	
Model No:	HA-298																						
Cascade Fall																							
Material: SS-316/304																							
Opening Width (mm)																							
W: 300/450/600/900																							
Model No:	HA-299																						
Cascade Fall																							
Material: SS-316/304																							
Opening Width (mm)																							
W: 300/450/600/900																							
	<table border="1"> <tr> <td>Model No:</td> <td>HA-300</td> </tr> <tr> <td colspan="2">Cascade Fall</td> </tr> <tr> <td colspan="2">Material: SS-316/304</td> </tr> <tr> <td colspan="2">Opening Width (mm)</td> </tr> <tr> <td colspan="2">W: 300/450/600/900</td> </tr> </table>	Model No:	HA-300	Cascade Fall		Material: SS-316/304		Opening Width (mm)		W: 300/450/600/900			<table border="1"> <tr> <td>Model No:</td> <td>HA-301</td> </tr> <tr> <td colspan="2">Water Fall</td> </tr> <tr> <td colspan="2">Material: SS-316/304</td> </tr> <tr> <td colspan="2">Opening Width/Height (mm)</td> </tr> <tr> <td colspan="2">W: 300/600 H: 300/600</td> </tr> </table>	Model No:	HA-301	Water Fall		Material: SS-316/304		Opening Width/Height (mm)		W: 300/600 H: 300/600	
Model No:	HA-300																						
Cascade Fall																							
Material: SS-316/304																							
Opening Width (mm)																							
W: 300/450/600/900																							
Model No:	HA-301																						
Water Fall																							
Material: SS-316/304																							
Opening Width/Height (mm)																							
W: 300/600 H: 300/600																							
	<table border="1"> <tr> <td>Model No:</td> <td>HA-302</td> </tr> <tr> <td colspan="2">Water Fall</td> </tr> <tr> <td colspan="2">Material: SS-316/304</td> </tr> <tr> <td colspan="2">Opening Width/Height (mm)</td> </tr> <tr> <td colspan="2">W: 150/300/500/700/1000 H: 700/700/700/700/700</td> </tr> </table>	Model No:	HA-302	Water Fall		Material: SS-316/304		Opening Width/Height (mm)		W: 150/300/500/700/1000 H: 700/700/700/700/700			<table border="1"> <tr> <td>Model No:</td> <td>HA-303</td> </tr> <tr> <td colspan="2">Rain Fall</td> </tr> <tr> <td colspan="2">Material: SS-316/304</td> </tr> <tr> <td colspan="2">Opening Width/Height (mm)</td> </tr> <tr> <td colspan="2">W: 300/500/700/1000 H: 650/700/800/1000</td> </tr> </table>	Model No:	HA-303	Rain Fall		Material: SS-316/304		Opening Width/Height (mm)		W: 300/500/700/1000 H: 650/700/800/1000	
Model No:	HA-302																						
Water Fall																							
Material: SS-316/304																							
Opening Width/Height (mm)																							
W: 150/300/500/700/1000 H: 700/700/700/700/700																							
Model No:	HA-303																						
Rain Fall																							
Material: SS-316/304																							
Opening Width/Height (mm)																							
W: 300/500/700/1000 H: 650/700/800/1000																							
	<table border="1"> <tr> <td>Model No:</td> <td>HA-304</td> </tr> <tr> <td colspan="2">Rectangular Water Curtain</td> </tr> <tr> <td colspan="2">Material: SS-316/304</td> </tr> <tr> <td colspan="2">Opening Width/Height (mm)</td> </tr> <tr> <td colspan="2">W: 300/500/700/1000 H: 700/700/700/700</td> </tr> </table>	Model No:	HA-304	Rectangular Water Curtain		Material: SS-316/304		Opening Width/Height (mm)		W: 300/500/700/1000 H: 700/700/700/700			<table border="1"> <tr> <td>Model No:</td> <td>HA-305</td> </tr> <tr> <td colspan="2">Rectangular Water Curtain (Rain Effect)</td> </tr> <tr> <td colspan="2">Material: SS-316/304</td> </tr> <tr> <td colspan="2">Opening Width/Height (mm)</td> </tr> <tr> <td colspan="2">W: 300/500/700/1000 H: 700/700/700/700</td> </tr> </table>	Model No:	HA-305	Rectangular Water Curtain (Rain Effect)		Material: SS-316/304		Opening Width/Height (mm)		W: 300/500/700/1000 H: 700/700/700/700	
Model No:	HA-304																						
Rectangular Water Curtain																							
Material: SS-316/304																							
Opening Width/Height (mm)																							
W: 300/500/700/1000 H: 700/700/700/700																							
Model No:	HA-305																						
Rectangular Water Curtain (Rain Effect)																							
Material: SS-316/304																							
Opening Width/Height (mm)																							
W: 300/500/700/1000 H: 700/700/700/700																							
	<table border="1"> <tr> <td>Model No:</td> <td>HA-306</td> </tr> <tr> <td colspan="2">Water Curtain</td> </tr> <tr> <td colspan="2">Material: SS-316/304</td> </tr> <tr> <td colspan="2">Opening Width/Height (mm)</td> </tr> <tr> <td colspan="2">W: 300/H: 300 W: 300/H: 600 W: 450/H: 600</td> </tr> </table>	Model No:	HA-306	Water Curtain		Material: SS-316/304		Opening Width/Height (mm)		W: 300/H: 300 W: 300/H: 600 W: 450/H: 600			<table border="1"> <tr> <td>Model No:</td> <td>HA-307</td> </tr> <tr> <td colspan="2">Spa Water Fall</td> </tr> <tr> <td colspan="2">Material: SS-316/304</td> </tr> <tr> <td colspan="2">Opening Width/Height (mm)</td> </tr> <tr> <td colspan="2">W: 300/H: 300 W: 300/H: 600 W: 450/H: 600</td> </tr> </table>	Model No:	HA-307	Spa Water Fall		Material: SS-316/304		Opening Width/Height (mm)		W: 300/H: 300 W: 300/H: 600 W: 450/H: 600	
Model No:	HA-306																						
Water Curtain																							
Material: SS-316/304																							
Opening Width/Height (mm)																							
W: 300/H: 300 W: 300/H: 600 W: 450/H: 600																							
Model No:	HA-307																						
Spa Water Fall																							
Material: SS-316/304																							
Opening Width/Height (mm)																							
W: 300/H: 300 W: 300/H: 600 W: 450/H: 600																							
	<table border="1"> <tr> <td>Model No:</td> <td>HA-308</td> </tr> <tr> <td colspan="2">Wall Rainfall</td> </tr> <tr> <td colspan="2">Material: SS-316/304</td> </tr> <tr> <td colspan="2">Opening Width/Height (mm)</td> </tr> <tr> <td colspan="2">W: 300/500/700/1000 H: 130/130/130/130</td> </tr> </table>	Model No:	HA-308	Wall Rainfall		Material: SS-316/304		Opening Width/Height (mm)		W: 300/500/700/1000 H: 130/130/130/130			<table border="1"> <tr> <td>Model No:</td> <td>HA-309</td> </tr> <tr> <td colspan="2">Water Decent</td> </tr> <tr> <td colspan="2">Material: ABS</td> </tr> <tr> <td colspan="2">Opening Width (mm)</td> </tr> <tr> <td colspan="2">W: 300/600/900/1200</td> </tr> </table>	Model No:	HA-309	Water Decent		Material: ABS		Opening Width (mm)		W: 300/600/900/1200	
Model No:	HA-308																						
Wall Rainfall																							
Material: SS-316/304																							
Opening Width/Height (mm)																							
W: 300/500/700/1000 H: 130/130/130/130																							
Model No:	HA-309																						
Water Decent																							
Material: ABS																							
Opening Width (mm)																							
W: 300/600/900/1200																							

WATER FEATURES

Water Bowl Square/Round Fountain



Water Bowl Round Fountain




























Water Bowl Square Fountain



Swimming Pool Tiles

Glass Mosaic Tiles

				
HGM-01	HGM-02	HGM-03	HGM-04	HGM-05
				
HGM-06	HGM-07	HGM-08	HGM-09	HGM-10
				
HGM-11	HGM-12	HGM-13	HGM-14	HGM-15
				
HGM-16	HGM-17	HGM-18	HGM-19	HGM-20
				
HGM-21	HGM-22	HGM-23	HGM-24	HGM-25


Swimming Pool Tiles

Glass Mosaic Tiles


HGM-26	HGM-27	HGM-28	HGM-29	HGM-30
HGM-31	HGM-32	HGM-33	HGM-34	HGM-35
HGM-36	HGM-37	HGM-38	HGM-39	HGM-40
HGM-41	HGM-42	HGM-43	HGM-44	HGM-45
HGM-46	HGM-47	HGM-48	HGM-49	HGM-50

Swimming Pool Tiles

Swimming Pool Tiles Design

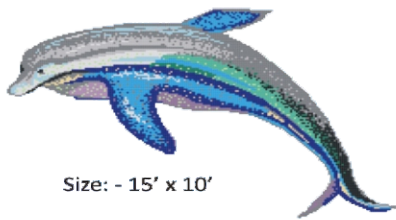


Size: - 15' x 10'

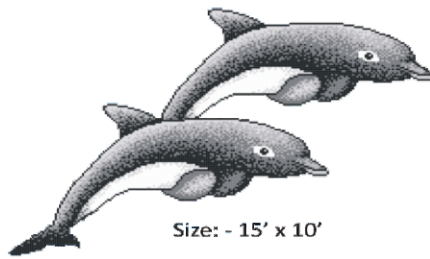

Size: - 15' x 10'



Size: - 16' x 24'

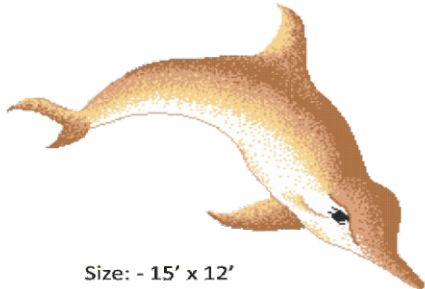

Size: - 15' x 12'



Size: - 8' x 8'




Size: - 7' x 14'



Size: - 4' x 4'




Size: - 6' x 9'

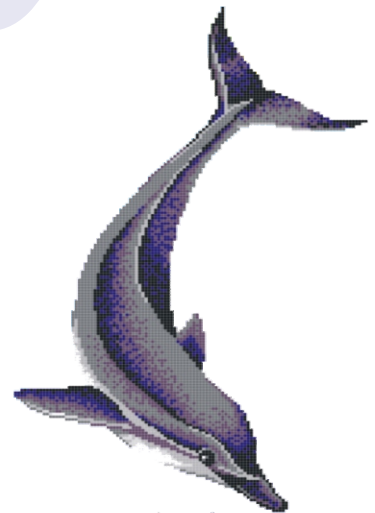

Size: - 8' x 14'




Size: - 8' x 5'

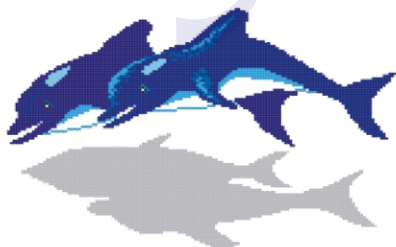

Size: - 10' x 8'



Size: - 7' x 5'3"



Size: - 7' x 6'

POOL FURNITURE



Pool & GARDEN FURNITURE



HAU-01



HAU-02



HAU-03



HPL-01



HPL-02



HPL-03

PHOTO GALLERY

Mushroom Umbrella | Pool and Fountains Ideas



HA-408



HA-409



HA-410



HA-411



HA-412



HA-413



HA-414



HA-415




HA-416




HA-417




HA-418

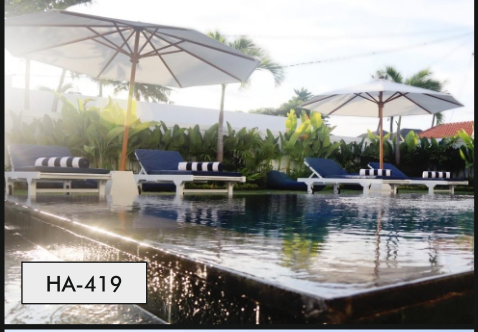


HA-419

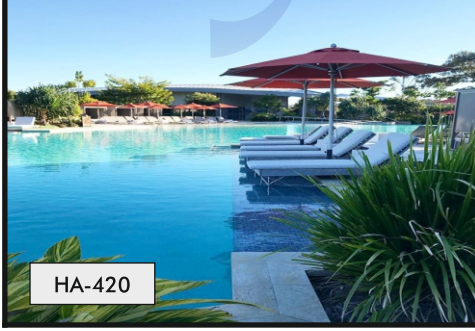

HA-420

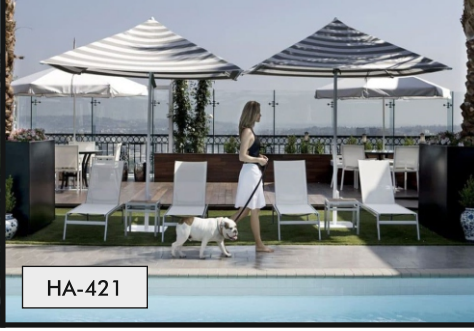

HA-421

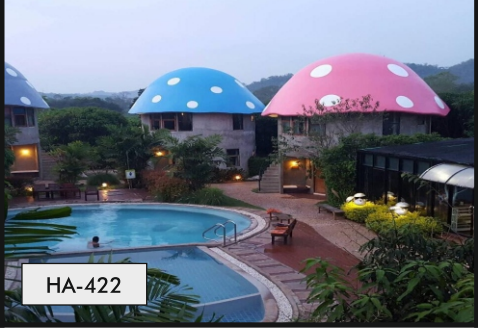

HA-422

PHOTO GALLERY


Swimming Pool Slide




HA-423



HA-424

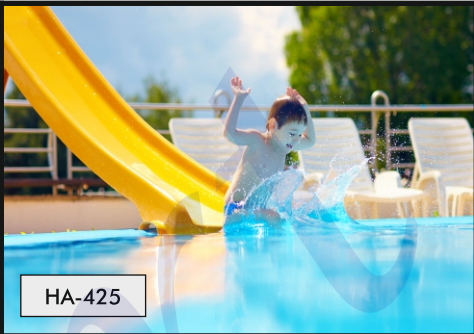

HA-425

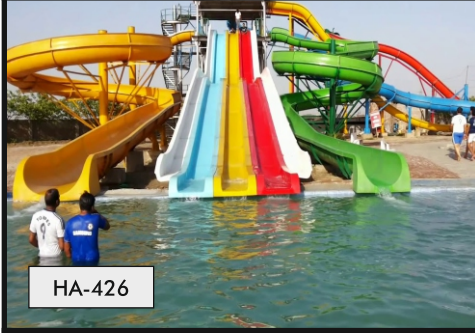

HA-426



HA-427




HA-428



HA-429




HA-430

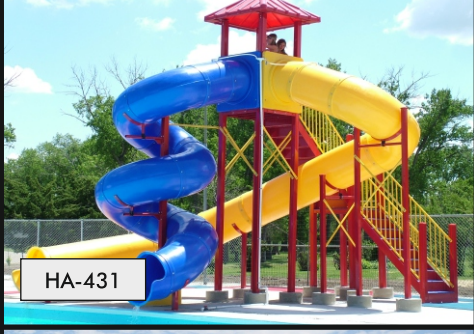

HA-431



HA-432

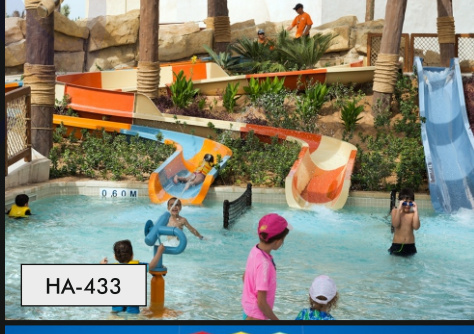


HA-433



HA-434



HA-435

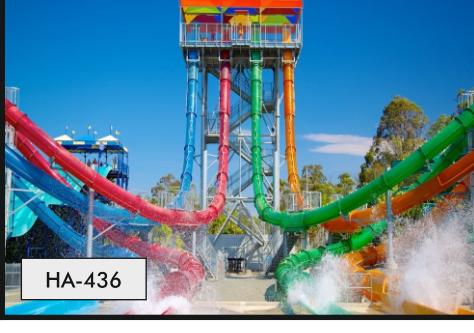

HA-436



HA-437

Halbent

DS WATER TECHNOLOGY

Office Add: 126, Mange Ram Park, (Pooth Kalan),
Near Rohini, Sector-23, New Delhi-110086

Ph: +91-9560752752, 9560756662

Email: dswatertechnology@gmail.com

info@dswswimmingpool.in

www.dswswimmingpool.com

